




**INSTRUCTION, SAFETY BELT INSTALLATION KIT  
(WL7A)  
P/N 267492-01**

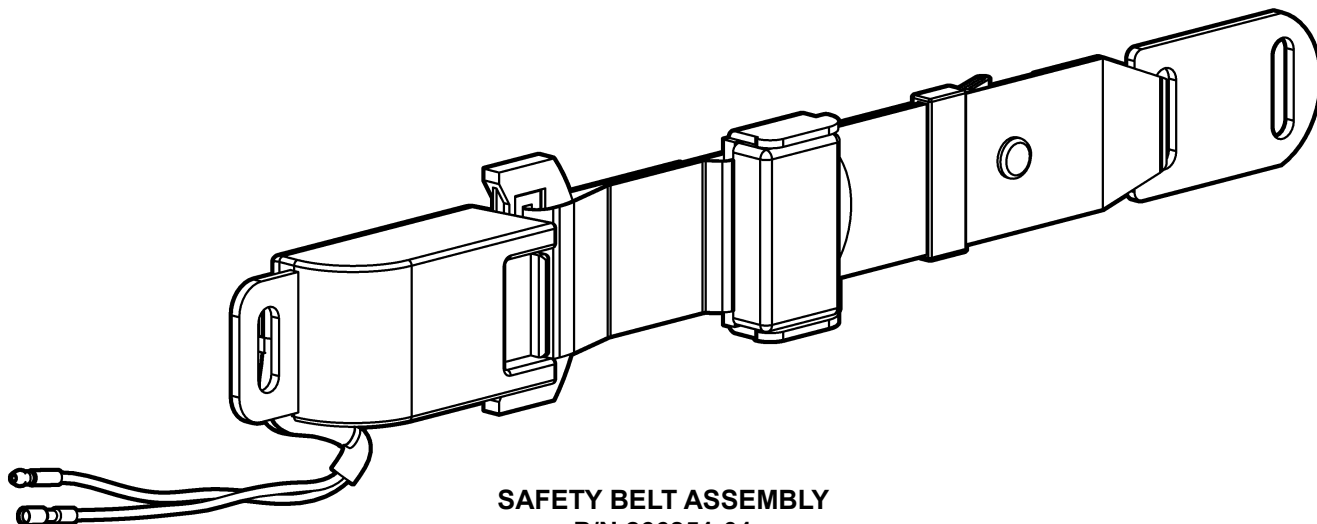

**SAFETY BELT ASSEMBLY  
P/N 266851-01  
QTY. 1**



**CAP SCREW,  
5/16"-18 X 3/4" LG, GRADE 8  
P/N 900009-3  
QTY. 3**



**CAP SCREW,  
5/16"-18 X 1-1/4" LG, GRADE 8  
P/N 900009-5  
QTY. 1**



**LOCK NUT, 5/16"-18  
P/N 901001  
QTY. 4**




**HEX NUT, 5/16"-18  
P/N 901011-3  
QTY. 1**




**FLAT WASHER, 5/16"  
P/N 902000-7  
QTY. 4**

1. See the WL7 Operation Manual (**MP-05-11**) for operating instructions. Then apply power to the Lift by turning **ON** the switch on the Pump Cover (**MP-05-11**). Next **UNFOLD** the Lift and lower the Platform to ground level (**FIG. 2-1**). Remove power from the Lift by turning **OFF** the switch on the Pump Cover (**MP-05-11**).

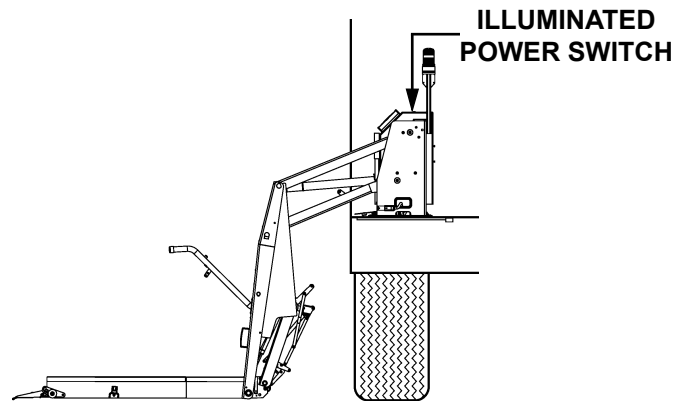

**PLATFORM AT GROUND LEVEL**  
**FIG. 2-1**


2. Remove rubber grommet from Right Hand RH side Handrail (**FIGS. 2-2A and 2-2B**).

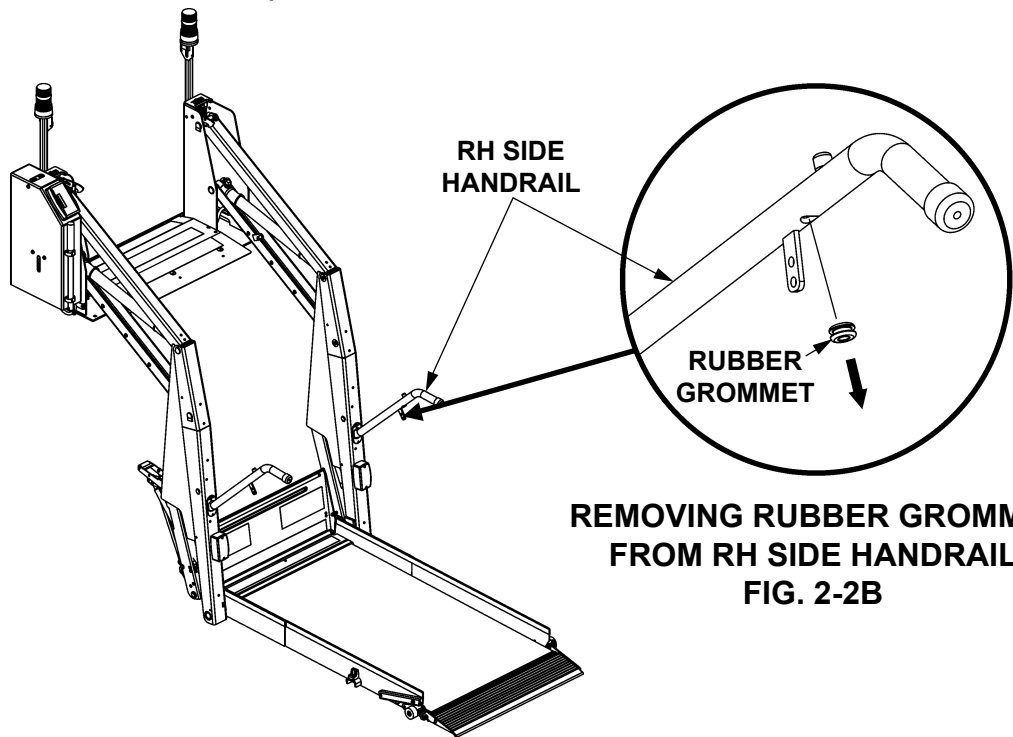

**REMOVING RUBBER GROMMET**  
**FROM RH SIDE HANDRAIL**  
**FIG. 2-2B**


**FIG. 2-2A**

3. Fish the wiring harness from the RH side Handrail (**FIG. 3-1**) and then feed it through the Rubber Grommet. Reinstall the Rubber Grommet.

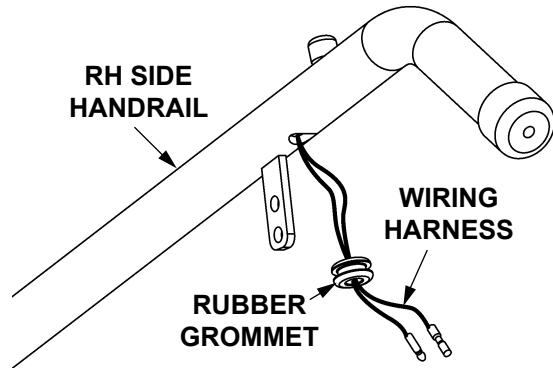


**FISHING WIRING HARNESS FROM RH SIDE HANDRAIL**  
**FIG. 3-1**

4. Unbuckle the Safety Belt (Kit item) (**FIG. 3-2**).

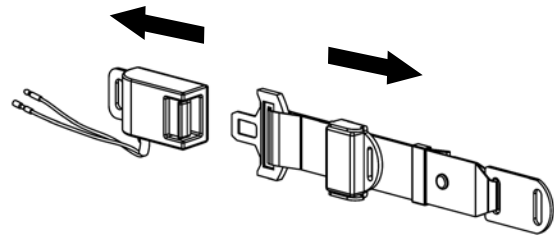


**UNBUCKLING SAFETY BELT**  
**FIG. 3-2**

5. Bolt the part of the Safety Belt, with the electrical wiring, to the RH side Handrail (**FIG. 3-3**).

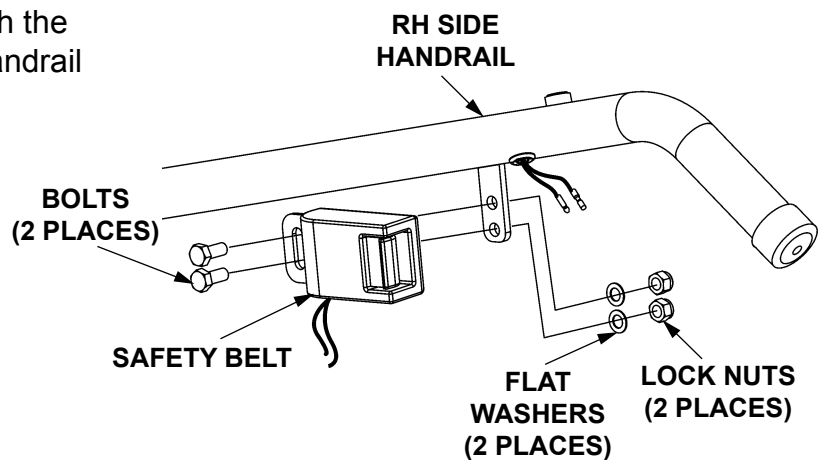

**BOLTING SAFETY BELT TO RH SIDE HANDRAIL**  
**FIG. 3-3**


6. Connect the Safety Belt wiring harness to the Handrail wiring harness. Feed the extra wiring back in the Handrail until the loom reaches the grommet. (**FIG. 4-1**).

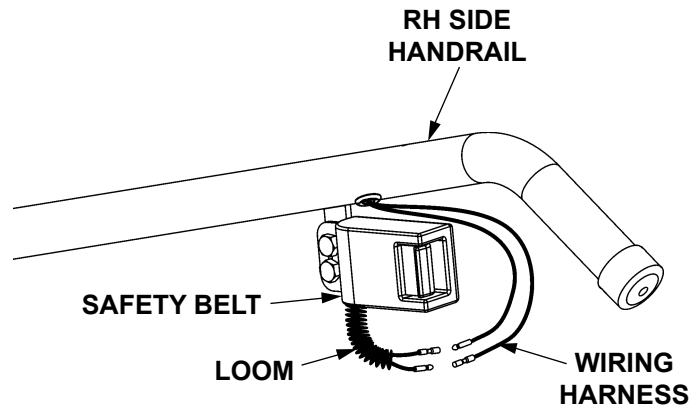

**CONNECTING SAFETY BELT WIRING HARNESS TO HANDRAIL WIRING HARNESS**  
**FIG. 4-1**


**NOTE:** The 1-1/4" long cap screw goes in the bottom hole on the Handrail bracket.

7. Bolt the remaining part of the Seatbelt, to the LH side Handrail as show in **FIGS. 4-2A and 4-2B**.

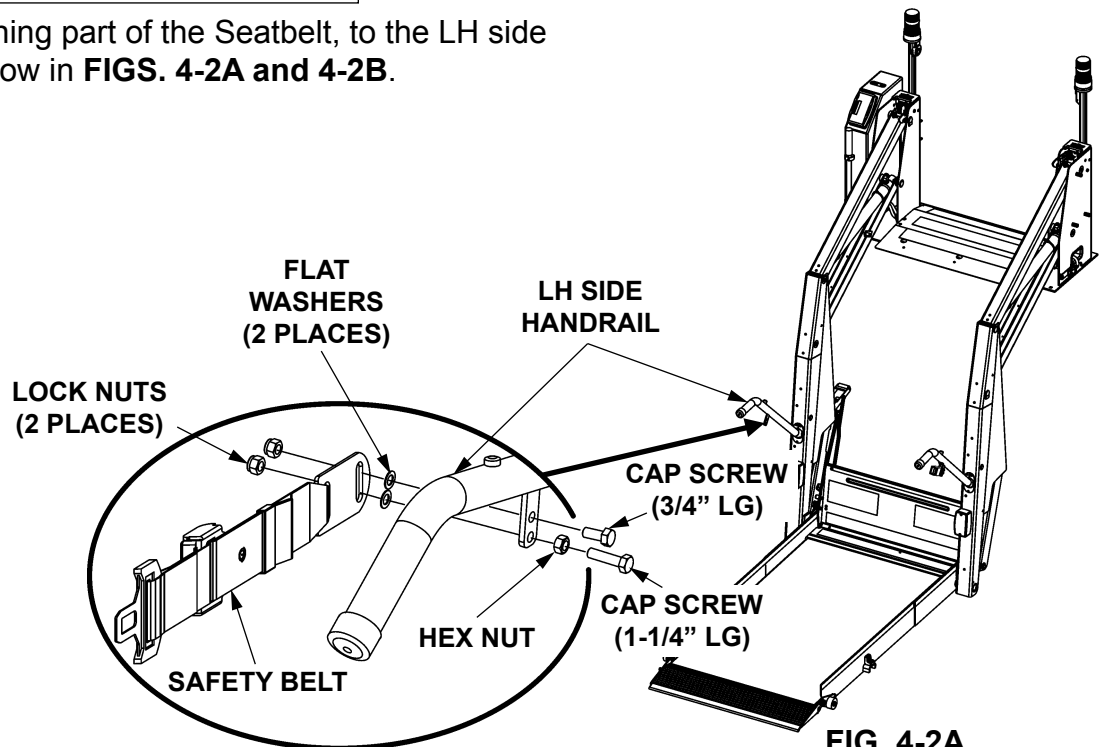


**BOLTING SAFETY BELT TO LH SIDE HANDRAIL**  
**FIG. 4-2B**

8. Loosen the lock nut and hex nut on the 1-1/4" long cap screw. Leave a 3/16" gap between the head of the cap screw and the hex nut as shown in **FIG. 5-1**. Then tighten the lock nut.

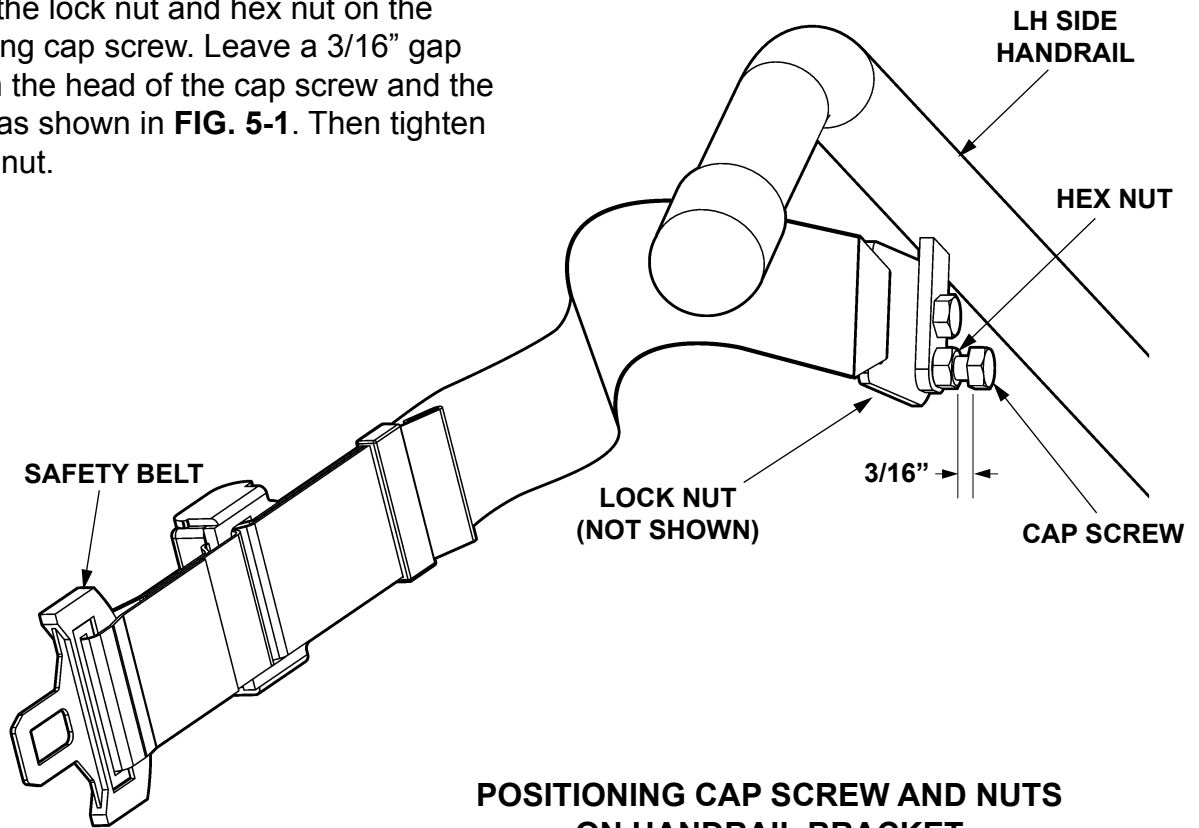


**POSITIONING CAP SCREW AND NUTS  
ON HANDRAIL BRACKET  
FIG. 5-1**

9. Adjust the Safety Belt length until it will buckle (**FIG. 6-1**). Then add another 3" to 4" of slack.

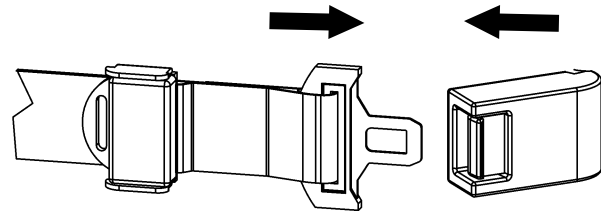


**ADJUSTING LENGTH OF  
SAFETY BELT  
FIG. 6-1**

10. Use the Hand Control to raise **UP** the Platform off the ground as shown in **FIG. 6-2**.

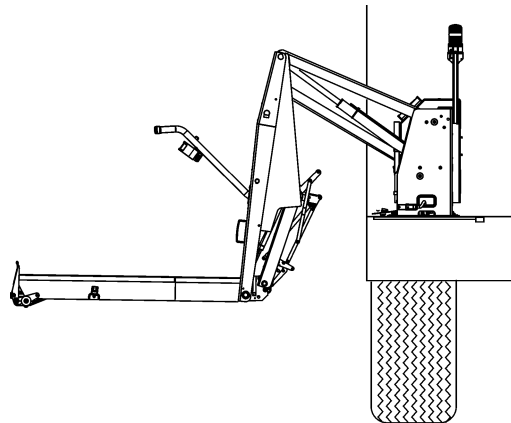


**PLATFORM RAISED  
ABOVE GROUND LEVEL  
FIG. 6-2**


11. Unbuckle the Safety Belt (**FIG. 7-1**). Use the Hand Control to raise **UP** the Platform. Platform should not raise and Controller should read **SEAT BLT** (**FIG. 7-2**).



**UNBUCKLING SAFETY BELT**  
**FIG. 7-1**

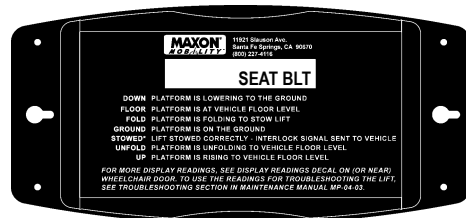


**CONTROLLER READING**  
**FIG. 7-2**



**BUCKLING SAFETY BELT**  
**FIG. 7-3**

12. Buckle the Safety Belt (**FIG. 7-3**). Use the Hand Control to raise the Platform to floor level. Platform should raise to floor level (**FIG. 7-4**).

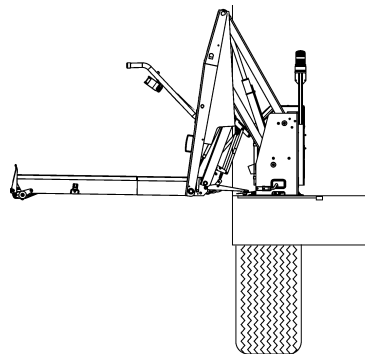

**PLATFORM RAISED TO FLOOR LEVEL**  
**FIG. 7-4**

13. Stow the Lift (see **MP-05-11**).