

M-06-08
REV. B
APRIL 2008

MAXON[®]
GPT

INSTALLATION MANUAL
GPT-25, GPT-3, GPT-4 & GPT-5

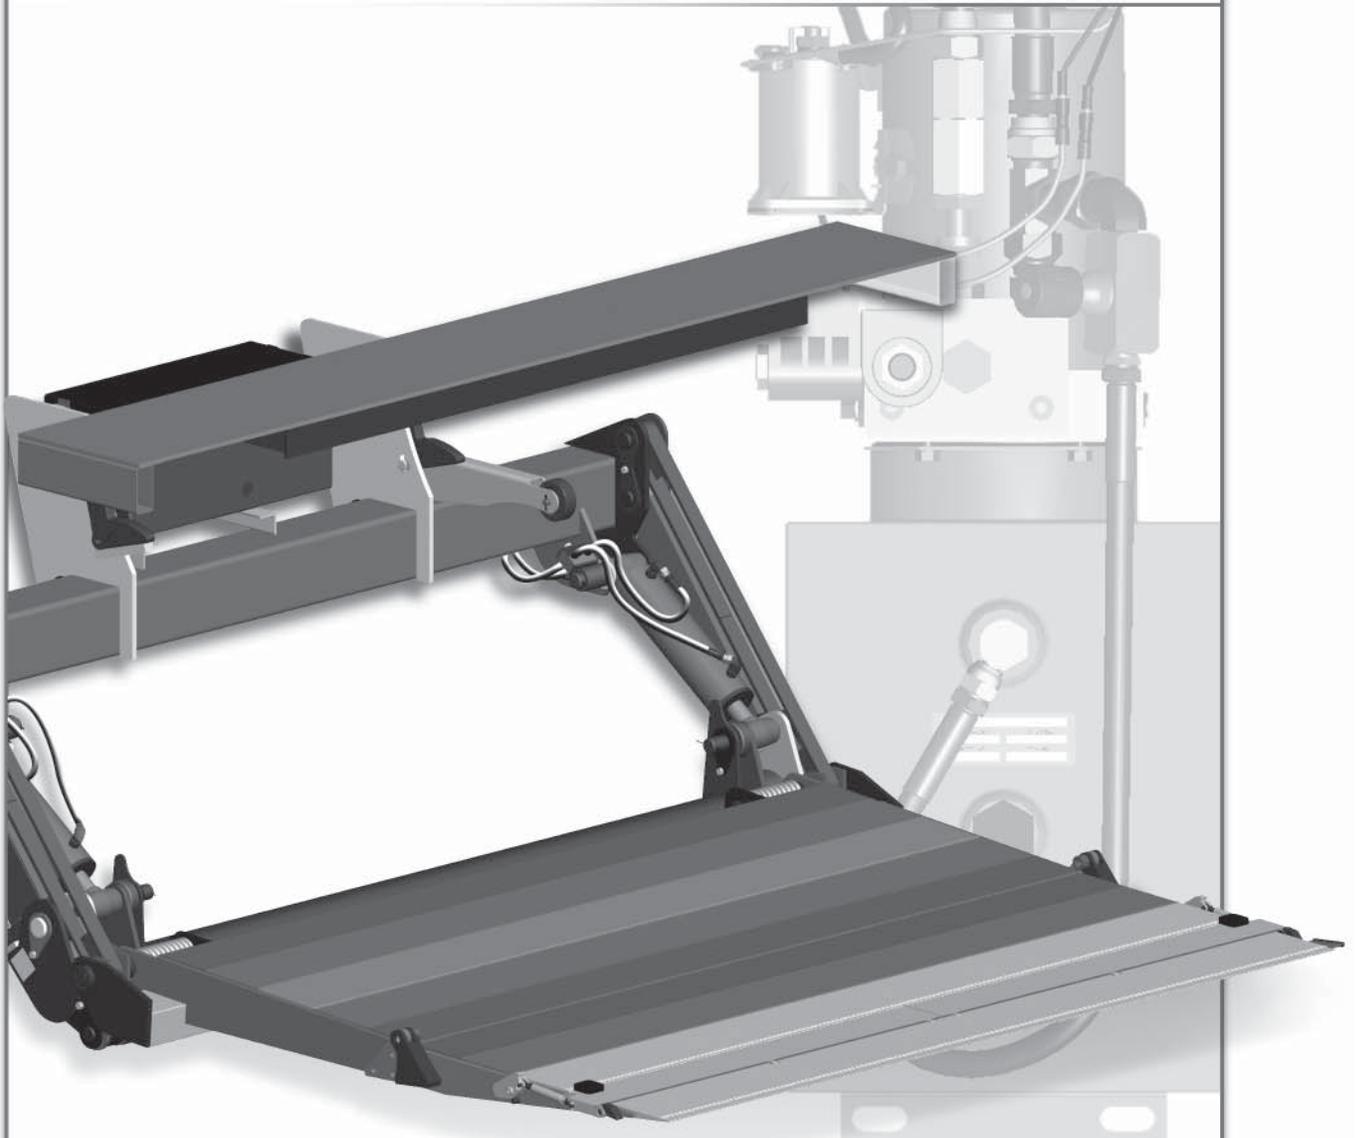


TABLE OF CONTENTS

WARNINGS	3
STANDARD LIFTGATE COMPONENTS	4
GPT-SERIES INSTALLATION PARTS BAGS	5
VEHICLE REQUIREMENTS	6
STEP 1 - WELD EXTENSION PLATE TO VEHICLE	9
STEP 2 - WELD LIFTGATE TO VEHICLE	11
STEP 3 - RUN POWER CABLE.....	14
STEP 4 - CONNECT POWER CABLE	15
STEP 5 - INSTALL CONTROL SWITCH	16
STEP 6 - CONNECT POWER CABLE TO BATTERY.....	19
STEP 7 - REMOVE LOCKING ANGLES & KNUCKLE BOLTS.....	20
STEP 8 - WELD PLATFORM OPENER TO LIFTGATE	21
STEP 9 - FINISH WELDING LIFTGATE TO VEHICLE	24
STEP 10 - INSTALL & ADJUST SADDLES	25
STEP 11 - WELD ON SADDLE SUPPORTS	26
STEP 12 - ADJUST PLATFORM (IF REQUIRED)	28
STEP 13 - CHECK HYDRAULIC FLUID	30
STEP 14 - WELD HOOK AND EYE TO LIFTGATE.....	31
STEP 15 - WELD DOCK BUMPERS TO LIFTGATE.....	32
STEP 16 - BOLT RUBBER BUMPERS TO LIFTGATE	33
STEP 17 - VEHICLE TAILLIGHT POSITIONING	34
ATTACH DECALS	35
TOUCHUP PAINT	37
HYDRAULIC SYSTEM DIAGRAM	38
ELECTRICAL SYSTEM DIAGRAM	39
OPTIONS	40
OPTIONAL LIFTGATE COMPONENTS.....	40
RECOMMENDED LIFTGATE POWER CONFIGURATION	41

Comply with the following **WARNINGS** while installing Liftgates. See Operation Manual for operating safety requirements.

WARNING

- Read and understand the instructions in this **Installation Manual** before installing Liftgate.
- Before operating the Liftgate, read and understand the operating instructions in **Operation Manual**.
- Comply with all **WARNING** and instruction decals attached to the Liftgate.
- Keep decals clean and legible. If decals are illegible or missing, replace them. Free replacement decals are available from **Maxon Customer Service**.
- Consider the safety and location of bystanders and location of nearby objects when operating the Liftgate. Stand to one side of the platform while operating the Liftgate.
- Do not allow untrained persons to operate the Liftgate.
- Do not stand, or allow obstructions, under the platform when lowering the Liftgate. **Be sure your feet are clear of the Liftgate.**
- **Keep fingers, hands, arms, legs, and feet clear of moving Liftgate parts (and platform edges) when operating the Liftgate.**
- **Correctly stow platform when not in use. Extended platforms could create a hazard for people and vehicles passing by.**
- **Make sure vehicle battery power is disconnected while installing Liftgate.** Connect vehicle battery power to the Liftgate only when installation is complete or as required in the installation instructions.
- Wear appropriate safety equipment such as protective eyeglasses, faceshield and clothing while performing maintenance on the Liftgate and handling the battery. Debris from drilling and contact with battery acid may injure unprotected eyes and skin.
- Be careful working by an automotive type battery. Make sure the work area is well ventilated and there are no flames or sparks near the battery. Never lay objects on the battery that can short the terminals together. If battery acid gets in your eyes, immediately seek first aid. If acid gets on your skin, immediately wash it off with soap and water.
- If an emergency situation arises (vehicle or Liftgate) while operating the Liftgate, release the control switch to stop the Liftgate.
- A correctly installed Liftgate operates smoothly and reasonably quiet. The only noticeable noise during operation comes from the power unit while the platform is raised and lowered. Listen for scraping, grating and binding noises and correct the problem before continuing to operate Liftgate.
- If it is necessary to stand on the platform while operating the Liftgate, keep your feet and any objects clear of the inboard edge of the platform. Your feet or objects on the platform can become trapped between the platform and the Liftgate extension plate.
- Never perform unauthorized modifications on the Liftgate. Modifications may result in early failure of the Liftgate and may create hazards for Liftgate operators and maintainers.
- Recommended practices for welding on steel parts are contained in the current **AWS (American Welding Society) D1.1 Structural Welding Code - Steel**. Damage to Liftgate and/or vehicle, and personal injury could result from welds that are done incorrectly.

STANDARD LIFTGATE COMPONENTS

⚠ CAUTION


Prevent injuries and equipment damage. Before cutting the shipping straps from the Liftgate, put Liftgate on level ground that will support at least 1500 pounds. Be careful lifting and moving components (such as extension plate) after shipping straps are removed.

NOTE: Make sure you have all components and parts before you start installing Liftgate. Compare parts in the part box and each kit box with packing list enclosed in each box. If parts and components are missing or incorrect, call:

Maxon Customer Service

Call (800) 227-4116 or

Send e-mail to customersupport@maxonlift.com

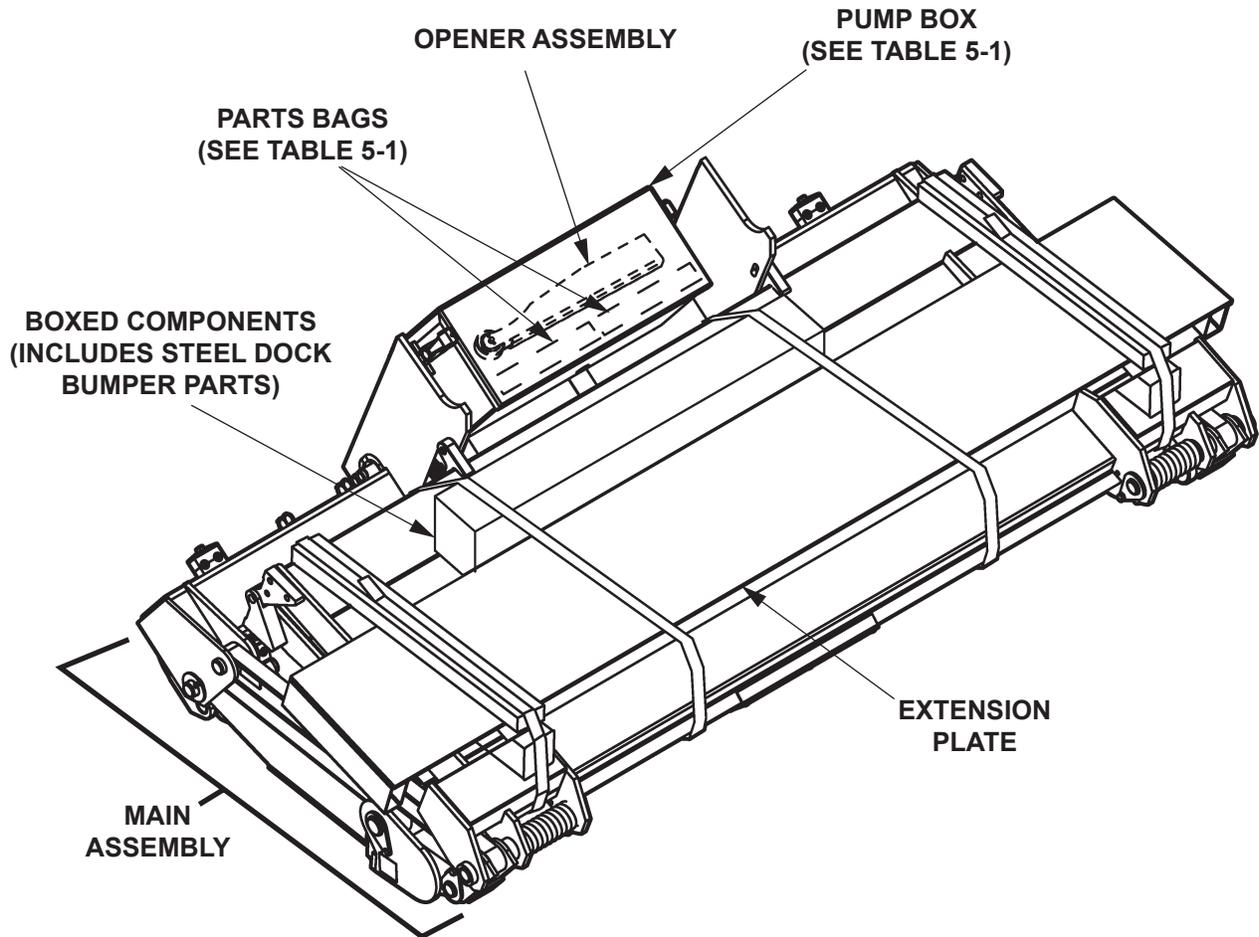

**TYPICAL LIFTGATE PACKAGED FOR SHIPMENT
FIG. 4-1**

GPT-SERIES INSTALLATION PARTS BAGS

	NOMENCLATURE OR DESCRIPTION	QTY.	PART NUMBER
1	PUMP ASSY, POWER DOWN	1	267490-01
2	HEAT SHRINK TUBING, 3/4" X 1-1/2" LG.	1	253316-04
3	MOLDED SWITCH ASSEMBLY	1	264951-01
4	SHIM, 3-1/2" X 1-3/4" X 1/4"	2	264731
5	SHIM, 2-1/5" X 1" X 1/16"	2	264732
6	FLAT, 2-1/2" 1" X 1/8"	2	201999
7	FLAT, 5" X 4" X 3/8"	2	229295
8	COPPER LUG (2GA)	1	906497-02
9	SELF-TAPPING SCREW, 10-24 X 1" LG.	4	900057-5
10	CLAMP, #10 RUBBER LOOM	2	801681
11	FRAME CLIP 1/2" X 1-3/8"	7	050079
12	DECAL & MANUAL KIT	1	266004-01 (GPT-25)
			266005-01 (GPT-3)
			266006-01 (GPT-4)
			266007-01 (GPT-5)
	A. OPERATION MANUAL	1	M-06-09
	B. INSTALLATION MANUAL	1	M-06-08
	C. MAINTENANCE MANUAL	1	M-06-10
D. WARRANTY CARD	1	M-78-78	
E. CUSTOMER SURVEY CARD	1	M-94-04	
F. DECALS	-	REFER TO DECAL PAGES IN THIS MANUAL	
13	EYE, DROP FORGED PAD, 3/4" X 1-1/2"	1	226938
14	HOOK ASSEMBLY	1	227700
15	FUSED POWER CABLE, 200 AMP, 38' LG.	1	264422
16	RUBBER DOCK BUMPER KIT	1	203410
17	SADDLE, LOW PROFILE	2	281539-01
18	HEX BOLT, FRAME, 1/2" -13 X 2-1/4" LG., GRADE 8	4	901024-3
19	LOCK NUT, FLANGE, 1/2"- 13	4	901023
20	FLAT, 3/4" X 1" X 6" (SADDLE SUPPORT)	2	090300-12

TABLE 5-1


VEHICLE REQUIREMENTS

NOTE: BODY maximum and minimum operating bed height:
For GPT-25, GPT-3, GPT-4, & GPT-5 with standard platform:
 Maximum height is **55"** (Unloaded). Minimum height is **46"** (Loaded).
 On vehicle bodies equipped with swing open doors, the extension plate and vehicle body must be modified to install this Liftgate.


NOTE: Make sure vehicle is parked on level ground while preparing vehicle and installing Liftgate.

NOTE: Dimensions are provided as reference for fitting Liftgate to vehicle body.

1. Check for correct clearances (**FIGS. 6-1 and 6-2**) on vehicle to prevent interference between vehicle and Liftgate.

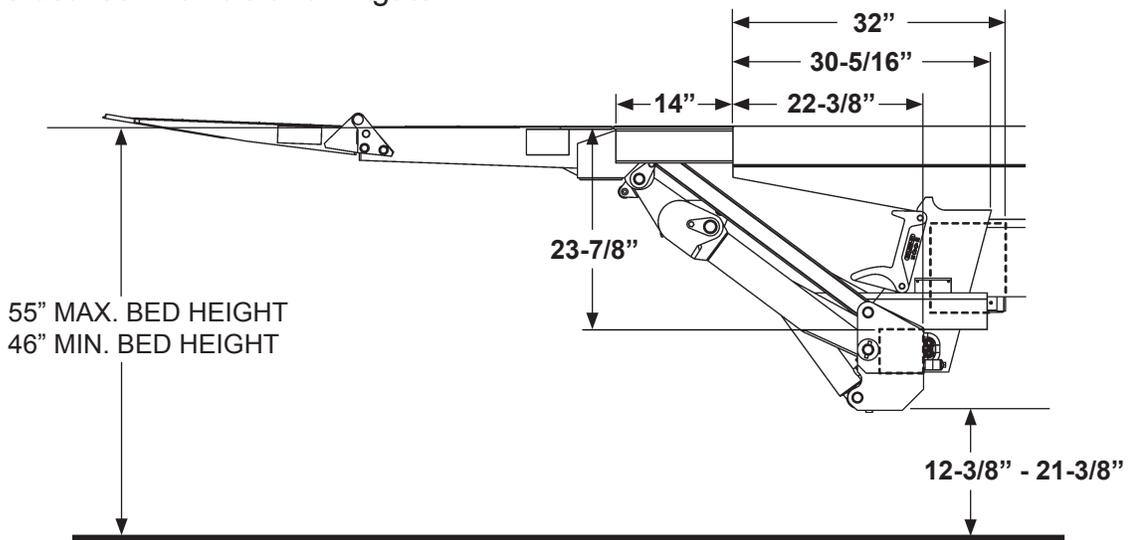

GPT-25 & GPT-3 CLEARANCES
FIG. 6-1

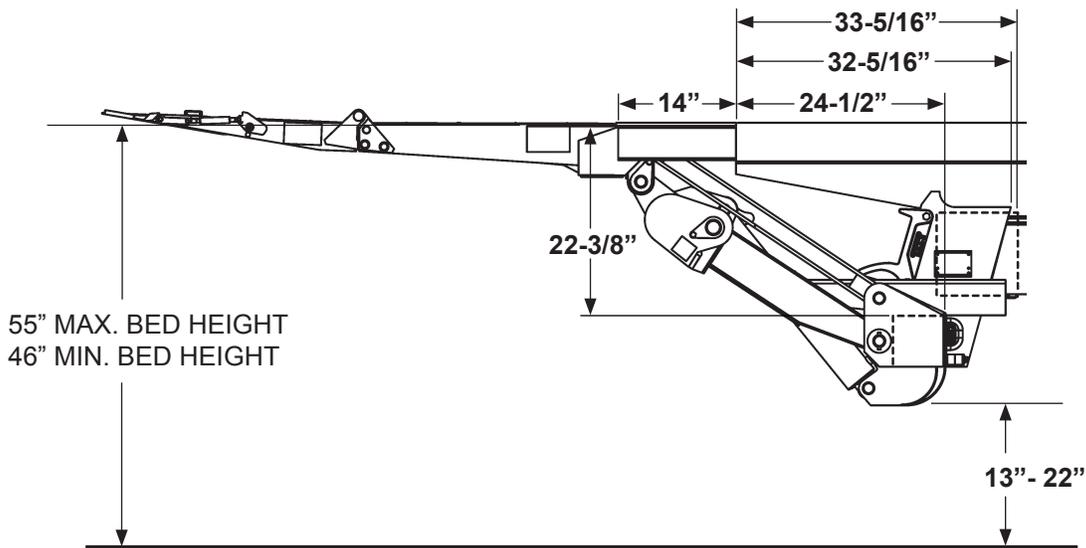

GPT-4 & GPT-5 CLEARANCES
FIG. 6-2

VEHICLE REQUIREMENTS - Continued

CAUTION


- To prevent aluminum platform from being damaged, make sure vehicle frame is cut correctly and rear sills are modified if over 4" in height. If the cutouts are incorrect, platform may hit vehicle frame or underbody when stowing the Lift-gate. If the rear sill is over 4" in height, bottom of the platform may hit the sill.
- Installer is responsible for ensuring that vehicle body and frame modifications do not adversely affect the integrity of the body and frame.

NOTE: The dimensions, shown in the illustration below, are maximums except as indicated.

NOTE: The platform cutout area shown below applies to trucks and trailers.

NOTE: See the next page for interference areas that can result from rear sills over 4" in height.

2. Fit the Liftgate to vehicle body by cutting vehicle frame as shown in **FIG. 7-1**.

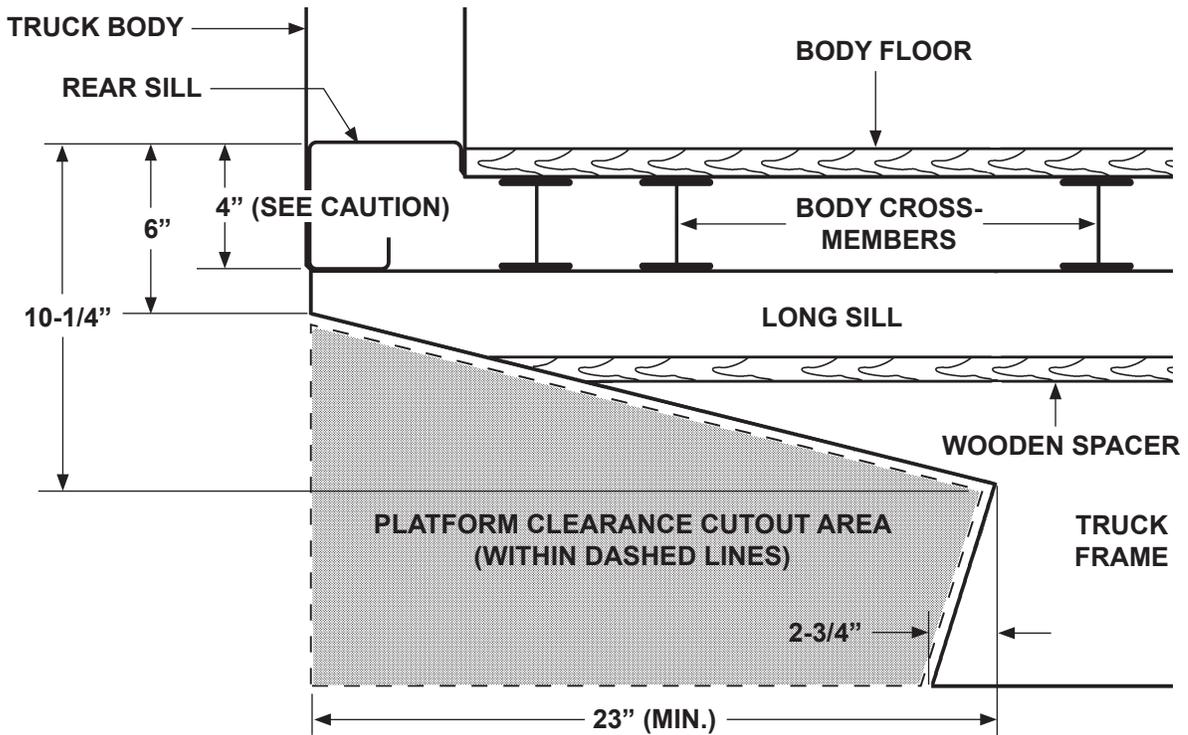


**VEHICLE FRAME CUTOUT FOR PLATFORM CLEARANCE
(GPT-25, GPT-3, GPT-4 & GPT-5)
(TRUCK FRAME IS SHOWN)**


FIG. 7-1

VEHICLE REQUIREMENTS - Continued

3. If the rear sill is over 4" in height, measure and mark the areas to be modified on the sill as shown in FIG. 8-1. A side view of the interference areas is shown in FIG. 8-2.

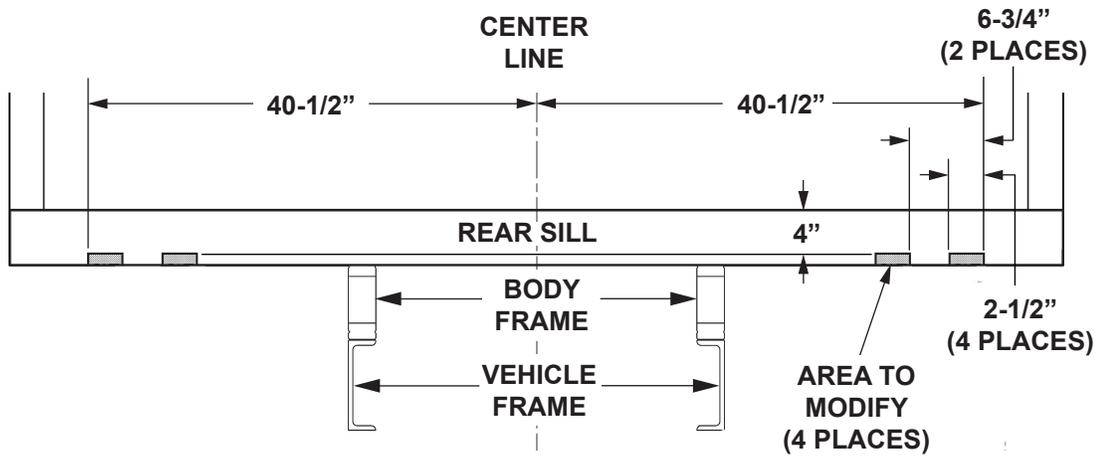


**FRONT VIEW - REAR SILL MORE THAN 4" IN HEIGHT
(LIFTGATE & EXTENSION PLATE NOT SHOWN)
FIG. 8-1**

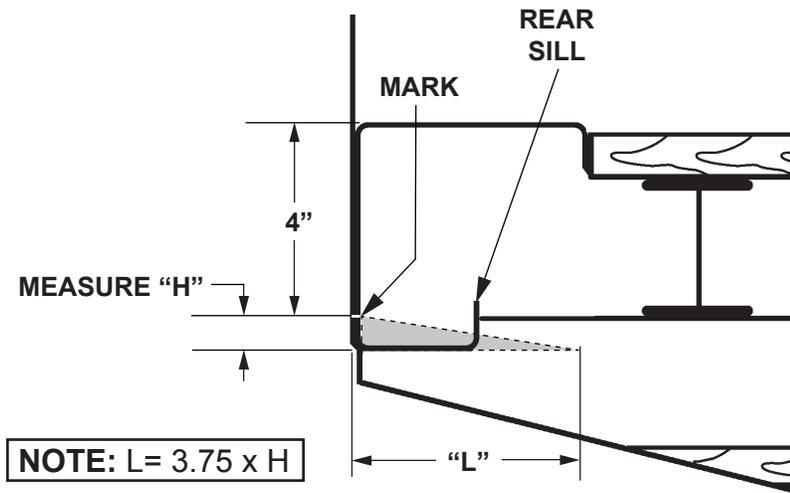


**SIDE VIEW - REAR SILL MORE THAN 4" IN HEIGHT
FIG. 8-2**

STEP 1 - WELD EXTENSION PLATE TO VEHICLE

- Center the extension plate on vehicle body. Before welding extension plate to vehicle body, make sure top surface of extension plate is flush with floor of vehicle body. Weld the extension plate to vehicle body sill as shown in **FIG. 9-1** and **FIG. 9-2**.

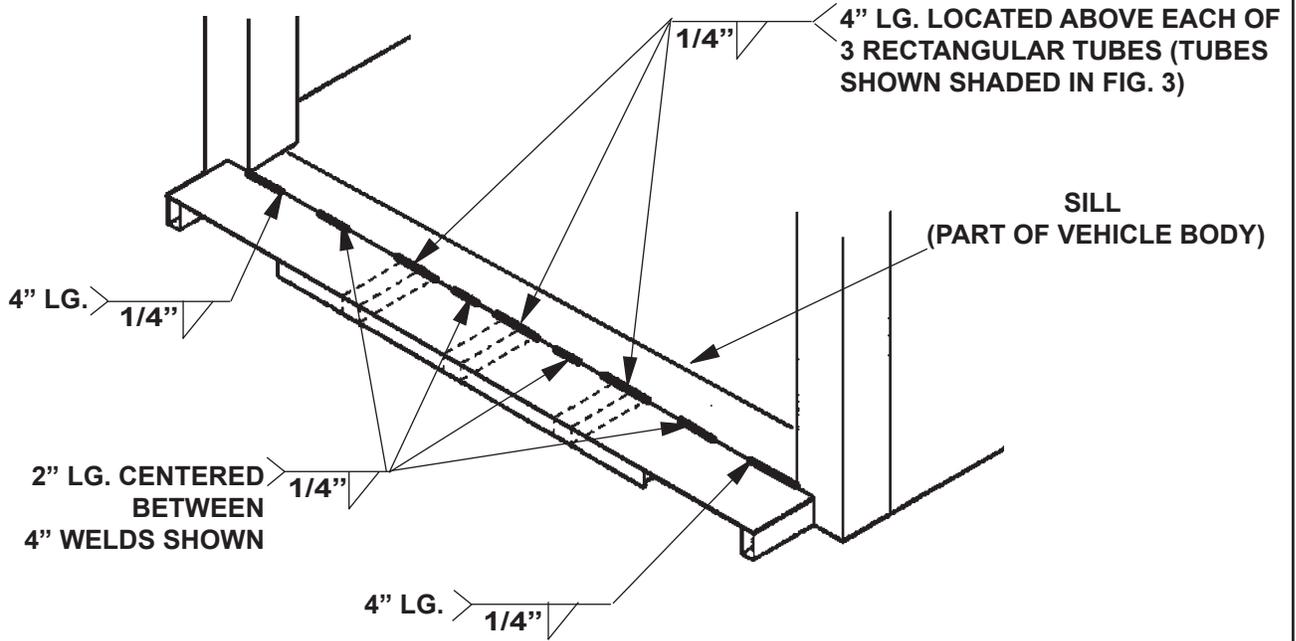


**EXTENSION PLATE WELDS - VIEWED FROM ABOVE
FIG. 9-1**

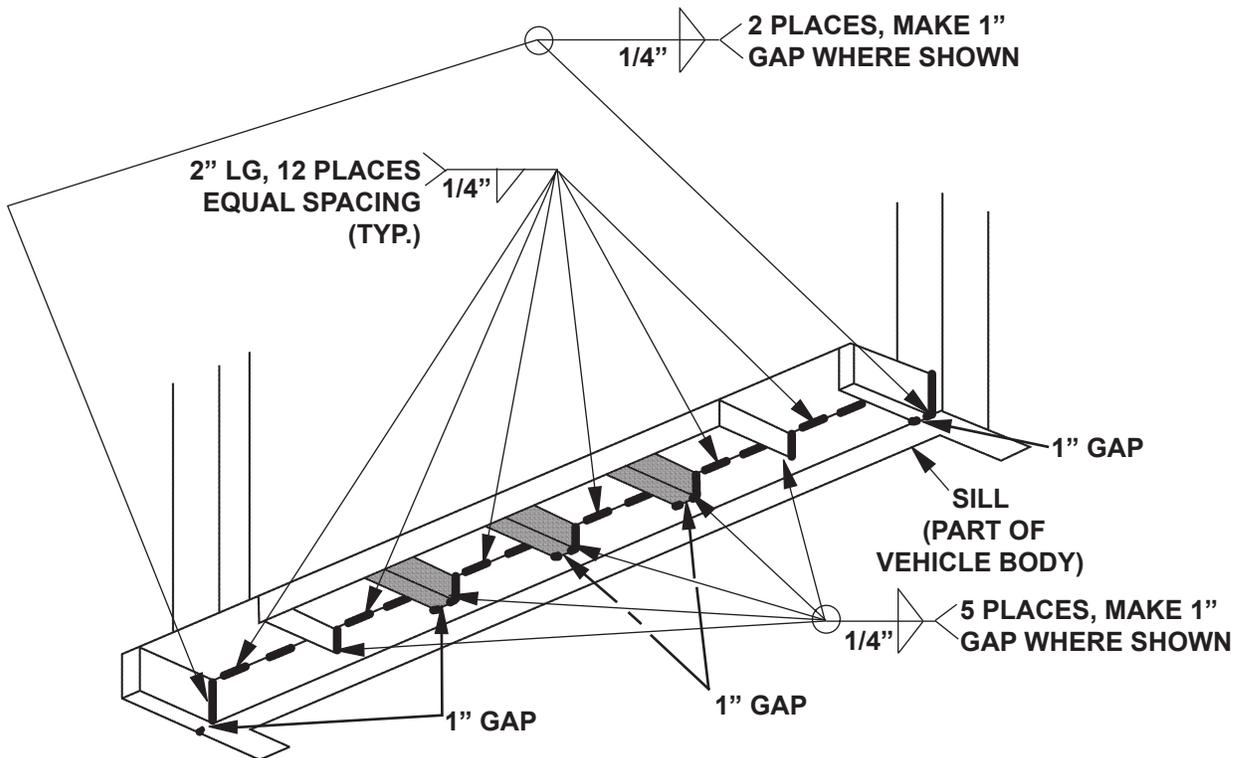

**EXTENSION PLATE WELDS - VIEWED FROM UNDERNEATH
FIG. 9-2**


STEP 1 - WELD EXTENSION PLATE TO VEHICLE - Continued

2. Place 2 temporary support straps (5" x 4" x 3/8" flats from parts bag) on the extension plate as shown in **FIG. 10-1A**. Also, put 2 temporary spacers (2" x 1" x 1/8" flats from parts bag) between platform and extension plate as shown in **FIG. 10-1B**. (Spacers keep 1/8" between platform and extension plate while welding Liftgate to vehicle frame.) Weld the straps and spacers to extension plate (**FIG. 10-1B**).

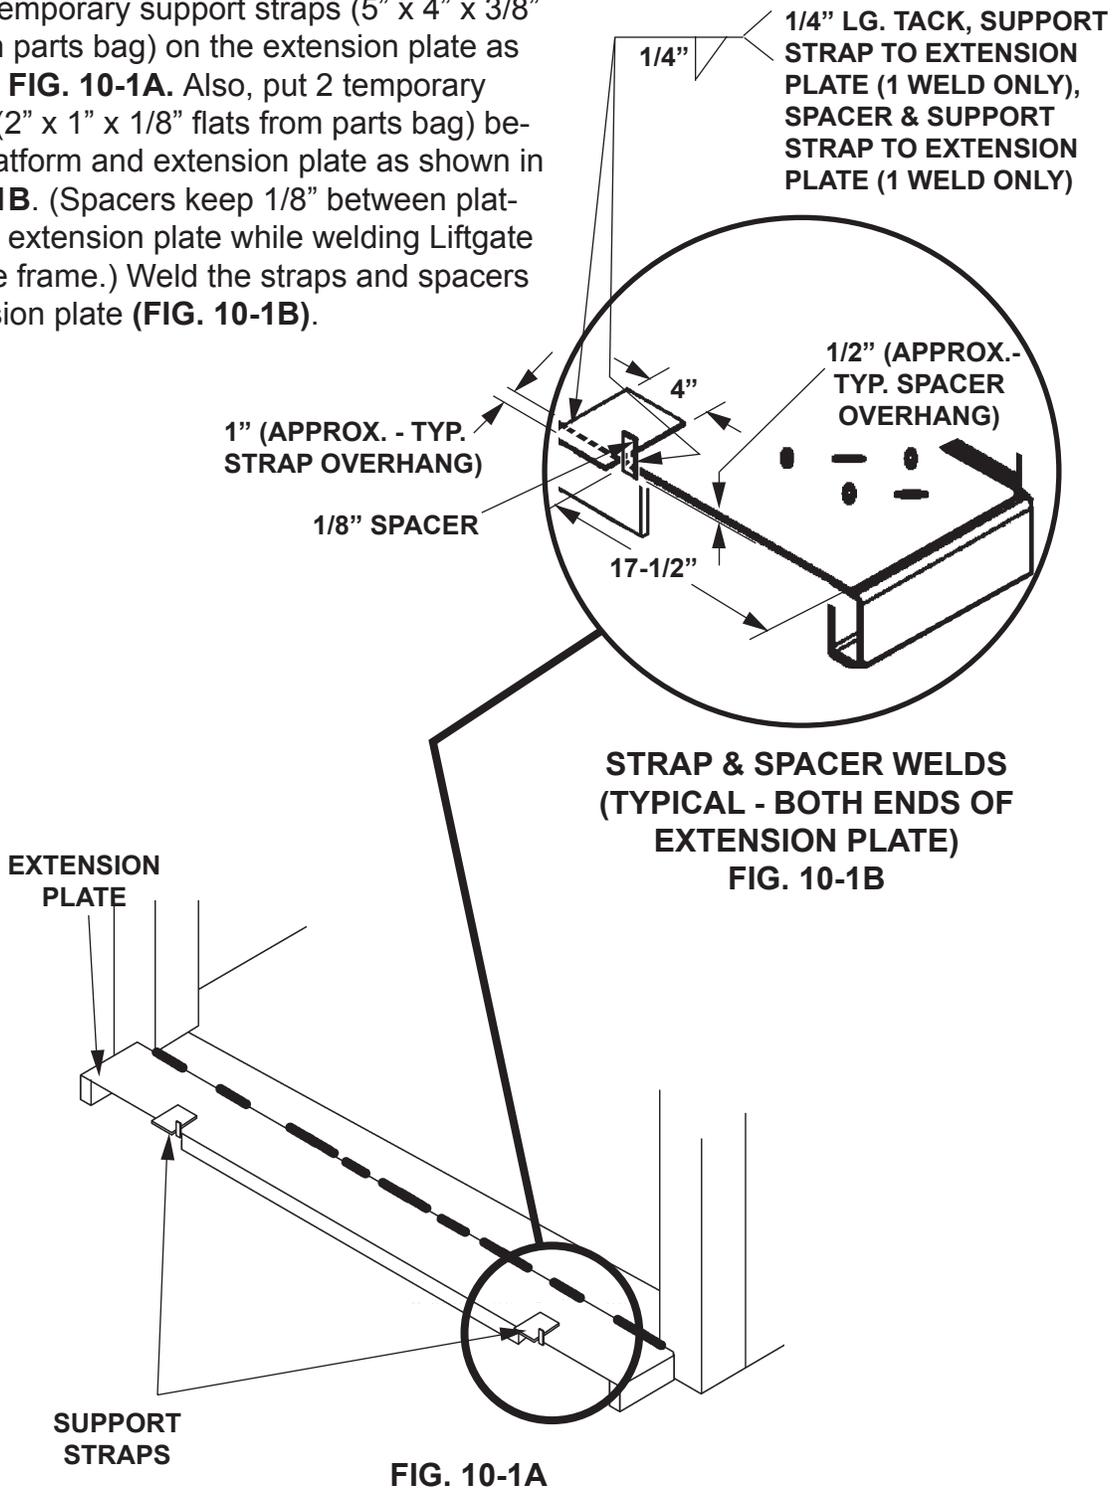


STEP 2 - WELD LIFTGATE TO VEHICLE

1. Remove split looms from mounting plates (FIGS. 11-1A & 11-1B).
(Split looms will be reinstalled later after final welding.)

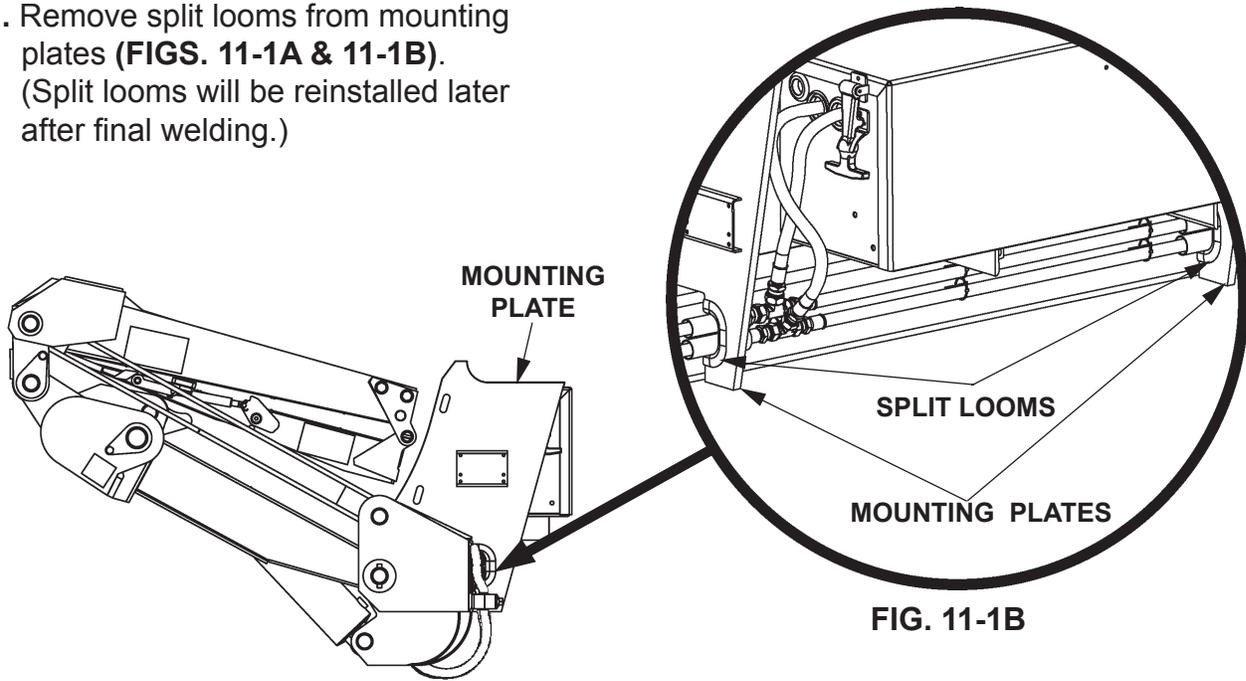

RH SIDE VIEW OF LIFTGATE
FIG. 11-1A

2. Unfold the platform and flipover (FIG. 11-2).

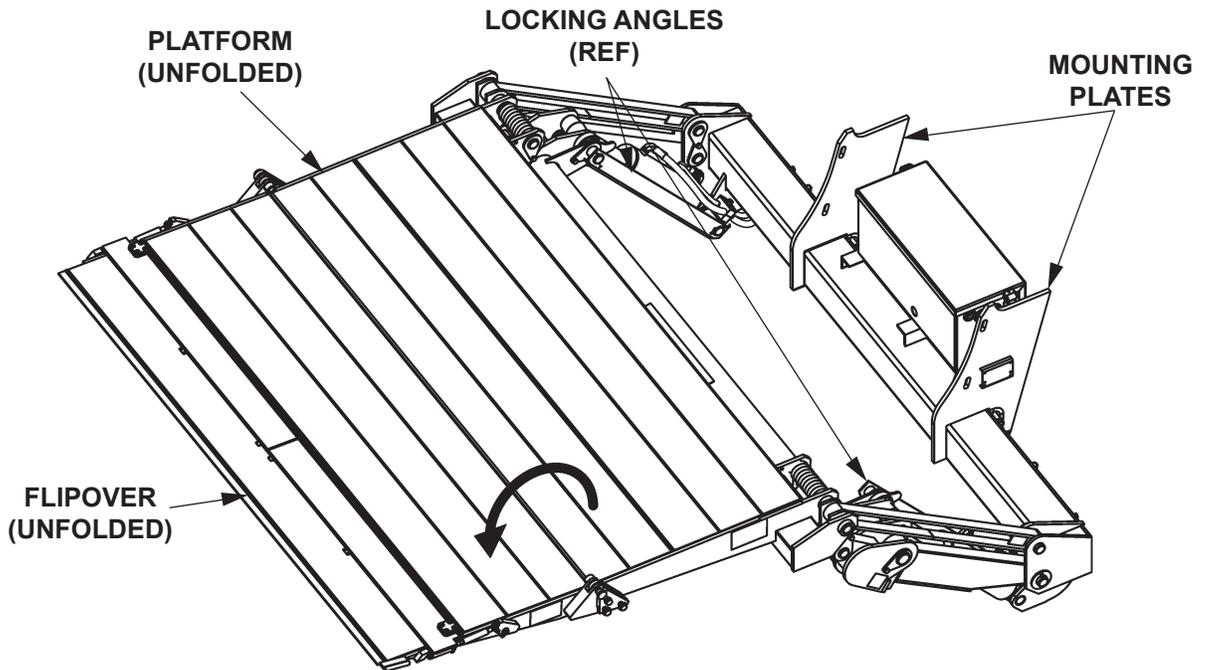


PLATFORM & FLIPOVER UNFOLDED
FIG. 11-2

STEP 2 - WELD LIFTGATE TO VEHICLE - Continued

⚠ CAUTION


To prevent damage to aluminum flipover, **NEVER** hoist the Liftgate by the flipover as shown in the NO illustration. Hoist the Liftgate by the platform only as shown in the YES illustration.

3. Make sure hoist is not being set up the incorrect way (FIG. 12-2). Place a "C"-clamp on each side of platform as shown in FIG. 12-1. (Clamps prevent hoist chain from slipping off platform.) Place chain all around platform (FIG. 12-1).

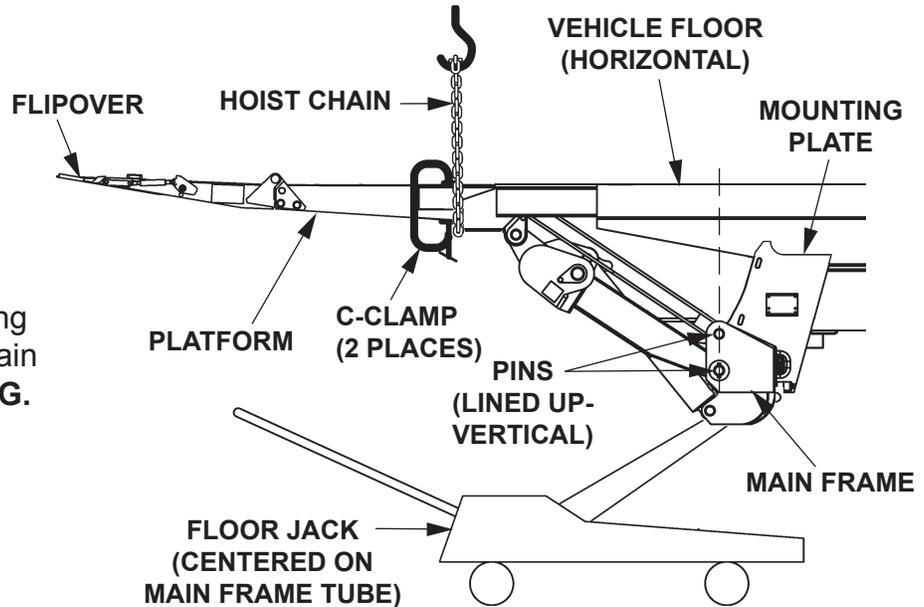

CORRECT WAY TO HOIST LIFTGATE
FIG. 12-1

4. Hoist the Liftgate. Then place floor jack under main frame (FIG. 12-1). Jack the Liftgate into position. Make sure vehicle floor is horizontal and pins are lined up (FIG. 12-1).

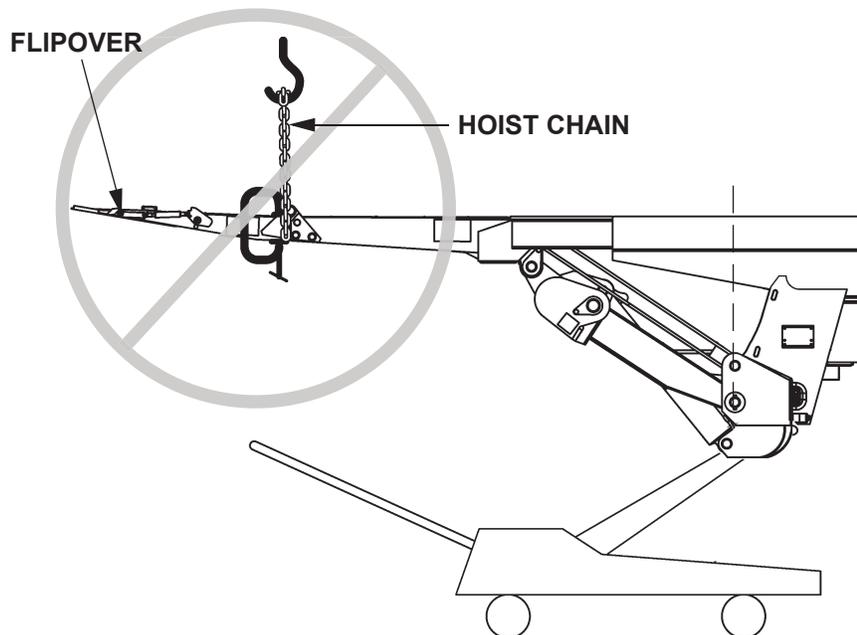

INCORRECT WAY TO HOIST LIFTGATE
FIG. 12-2

STEP 2 - WELD LIFTGATE TO VEHICLE - Continued


⚠ WARNING

Liftgate is shipped from factory with mounting plates that are only tack weld-
ed to main frame. Weld as shown in illustration before operating Liftgate.

CAUTION


Prevent damaged hydraulic hoses. If welding next to hydraulic hoses, use a
protective cover such as a welding blanket to cover the hoses.

5. Check if both mounting plates line up with the vehicle frame. If the mounting plates do not line up, remove the tack welds from one mounting plate (**FIG. 13-1**). Make sure Liftgate stays centered on vehicle. Reposition the mounting plate against vehicle frame. Tack weld as shown in **FIG. 13-1**. Repeat for second mounting plate (reposition and tack weld).

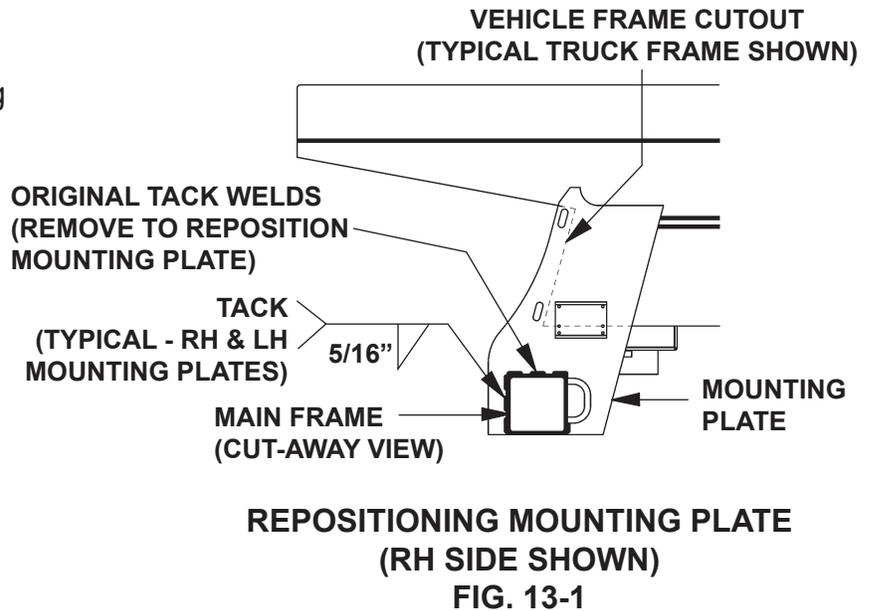

NOTE: Weld both mounting plates to vehicle frame before welding mounting plates to main frame.

6. Clamp both mounting plates to vehicle frame. Before welding, make sure cutout in vehicle frame does not block 2 slotted holes in mounting plate (**FIG. 13-2**). Weld the mounting plates to vehicle frame as shown in **FIG. 13-2**. Next, weld both mounting plates to main frame (**FIG. 13-2**). Remove clamps.

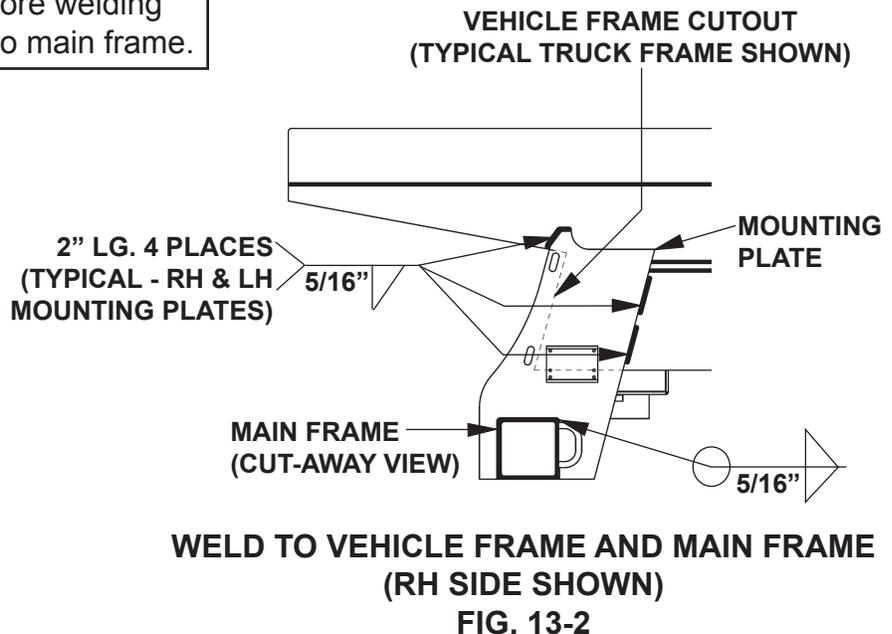

STEP 3 - RUN POWER CABLE

⚠ CAUTION

Never route an energized wire. Make sure the vehicle battery is disconnected. Always route electrical wires clear of moving parts, brake lines, sharp edges and exhaust systems. Avoid making sharp bends in wiring. Attach securely. If drilling is necessary, first check behind the drilling surface so you do not damage any fuel lines, vent lines, brake lines or wires.

Clip fused power cable to vehicle chassis, with fuse nearest the vehicle battery, as shown in FIG. 14-1. Keep enough cable near the battery to reach the positive terminal without putting tension on cable (after connection). Run bare wire end of cable to Liftgate.


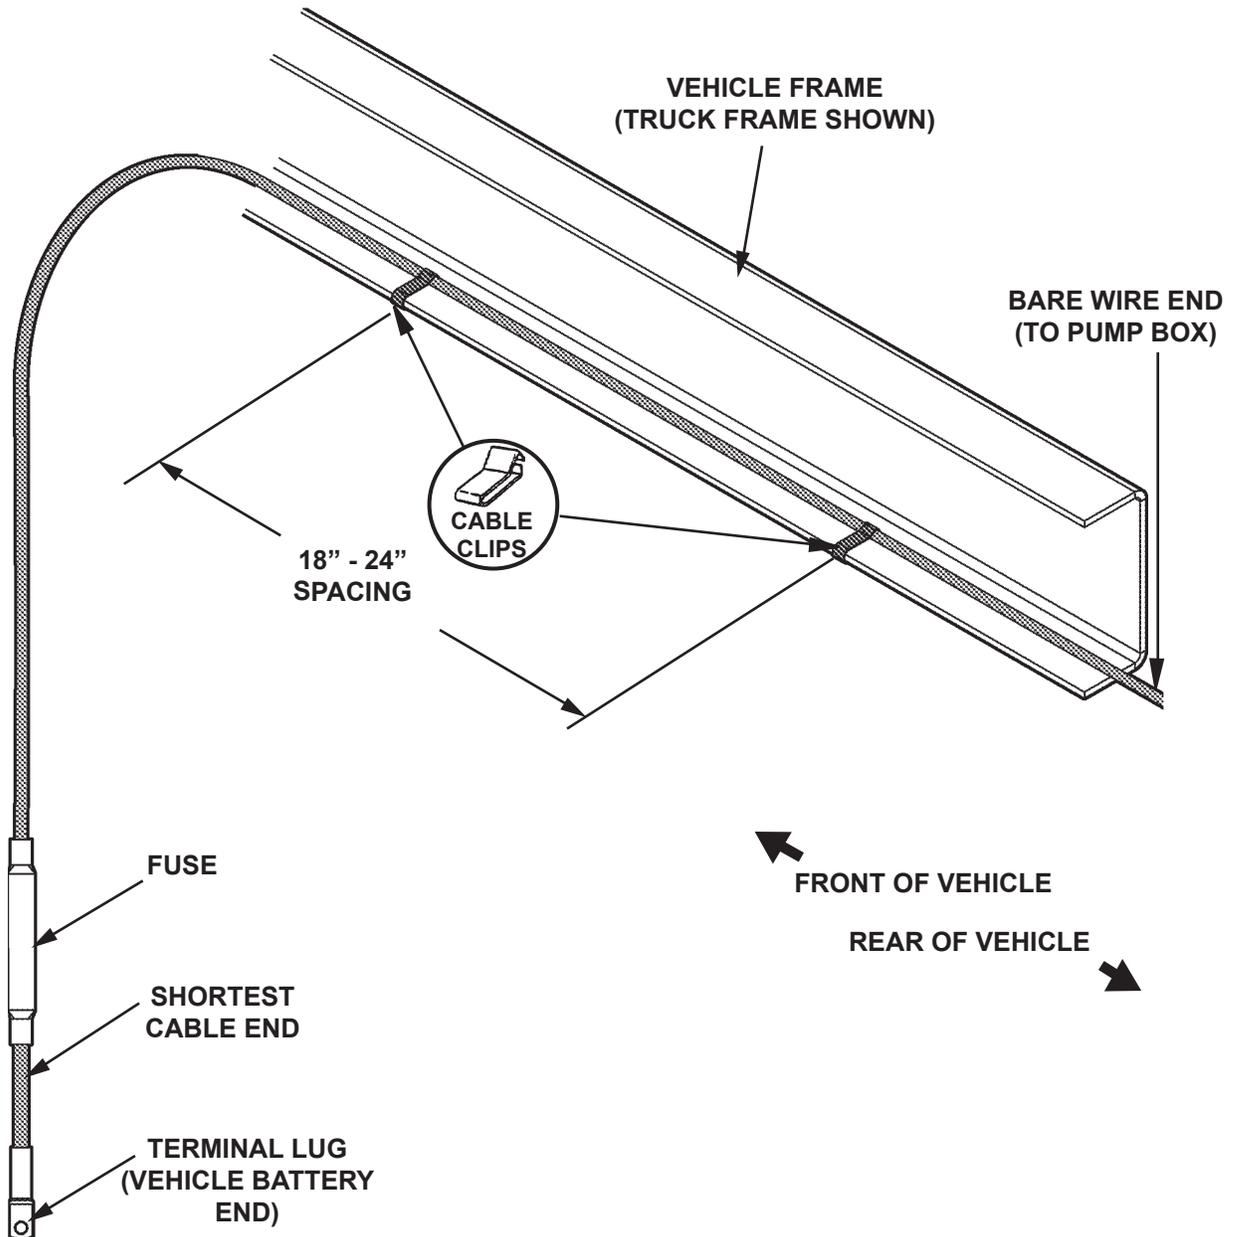


FIG. 14-1

STEP 4 - CONNECT POWER CABLE

1. On the bare wire end of fused power cable, keep enough length to attach copper terminal lug and reach motor solenoid without putting tension on cable (after connection) (**FIG. 15-1A**). Measure (if needed), and then cut excess cable from bare wire end of cable. Put heatshrink tubing (parts bag item) (**FIG. 15-1B**) on the end of the cable (leave room for terminal lug). Crimp copper terminal lug (parts bag item) on the fused power cable and shrink the heatshrink tubing (**FIG. 15-1C**).

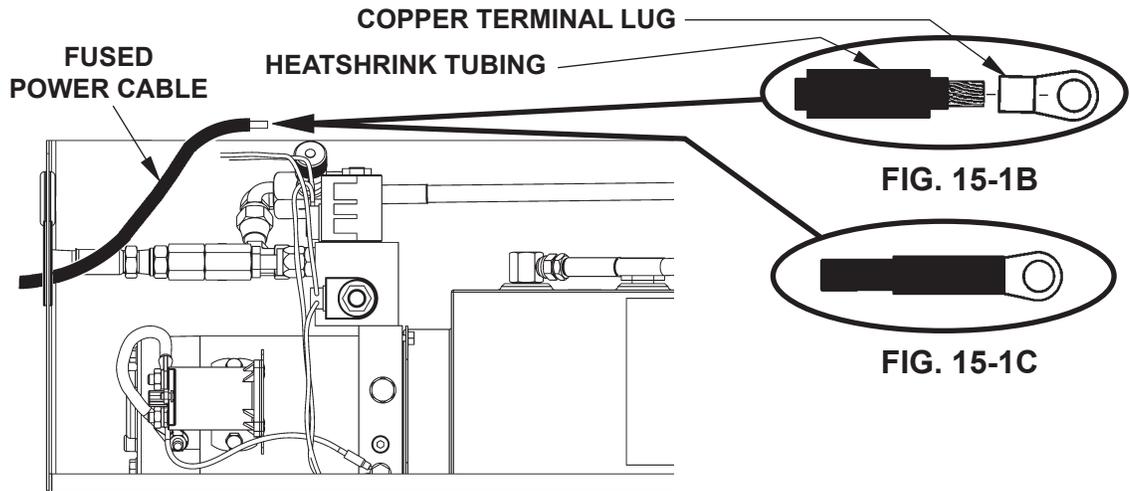

**TYPICAL FUSED POWER CABLE ROUTING
(POWER DOWN PUMP BOX SHOWN)
FIG. 15-1A**


CAUTION

Do not over-tighten the terminal nuts on starter solenoid. For the load terminals, torque nuts to 40 lbs.-in. max. Torque the nuts on #10-32 control terminals 15-20 lbs.-in.

NOTE: MAXON recommends using dielectric grease on all electrical connections.

NOTE: Do not remove flat washer from the battery power terminal.

2. Remove hex nut and lock washer from battery power terminal on the starter solenoid. Connect the fused power cable to the starter solenoid as shown in **FIG. 15-2**. Reinstall and tighten lock washer and hex nut.

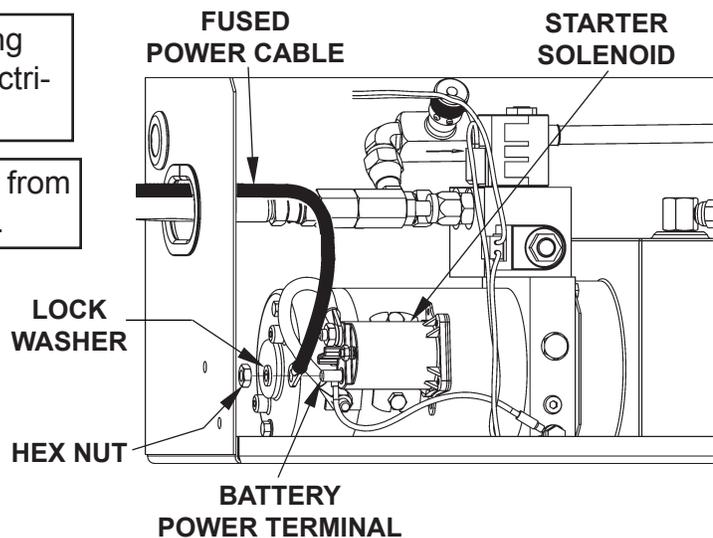

**TYPICAL FUSED POWER CABLE ELECTRICAL CONNECTION
(POWER DOWN PUMP BOX SHOWN)
FIG. 15-2**

STEP 5 - INSTALL CONTROL SWITCH

1. Drill one 3/4" hole and two #21-size holes in the vertical post on curb side of vehicle body as shown in FIG. 16-1A. Use template shown in FIG. 16-1B.



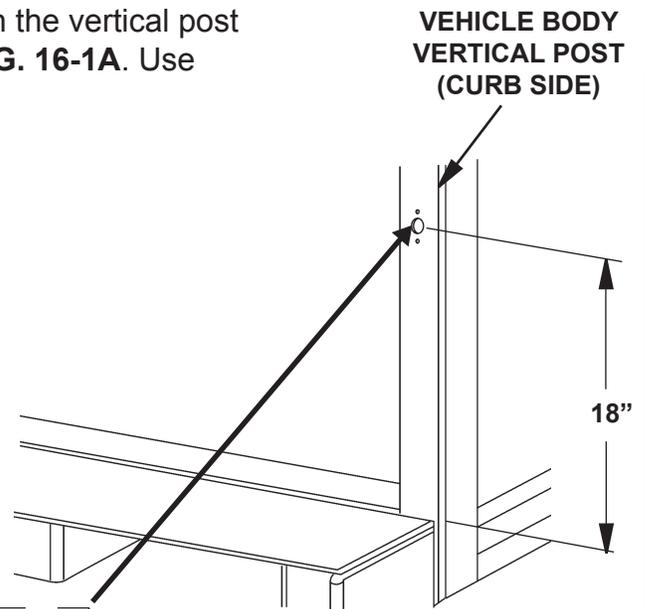


FIG. 16-1A

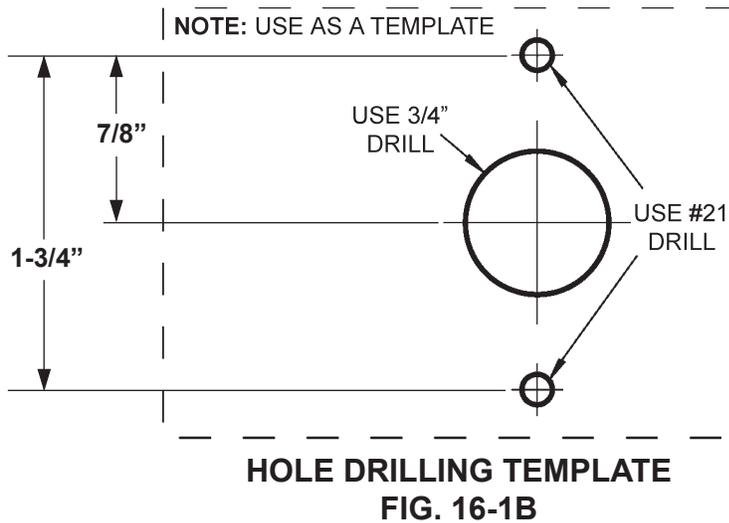


STEP 5 - INSTALL CONTROL SWITCH - Continued

2. Route the control switch cable through the $\frac{3}{4}$ " hole in the vertical post (FIG. 17-1B) and down the vertical post as shown in (see dashed line in FIG. 17-1A). When the control switch is close to the post, attach control switch to vertical post with 2 self-tapping screws (FIG. 17-1B).

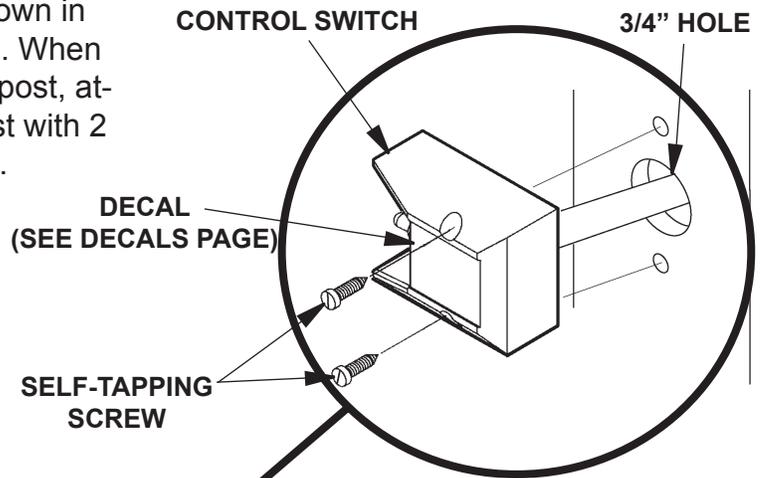

ATTACHING CONTROL SWITCH
FIG. 17-1B

3. Run control switch cable under vehicle body (see dashed line in FIG. 17-1A) and through the grommet on the pump box. Use 2 loom clamps and 2 self-tapping screws (parts bag item) to secure the control switch cable to vehicle frame.

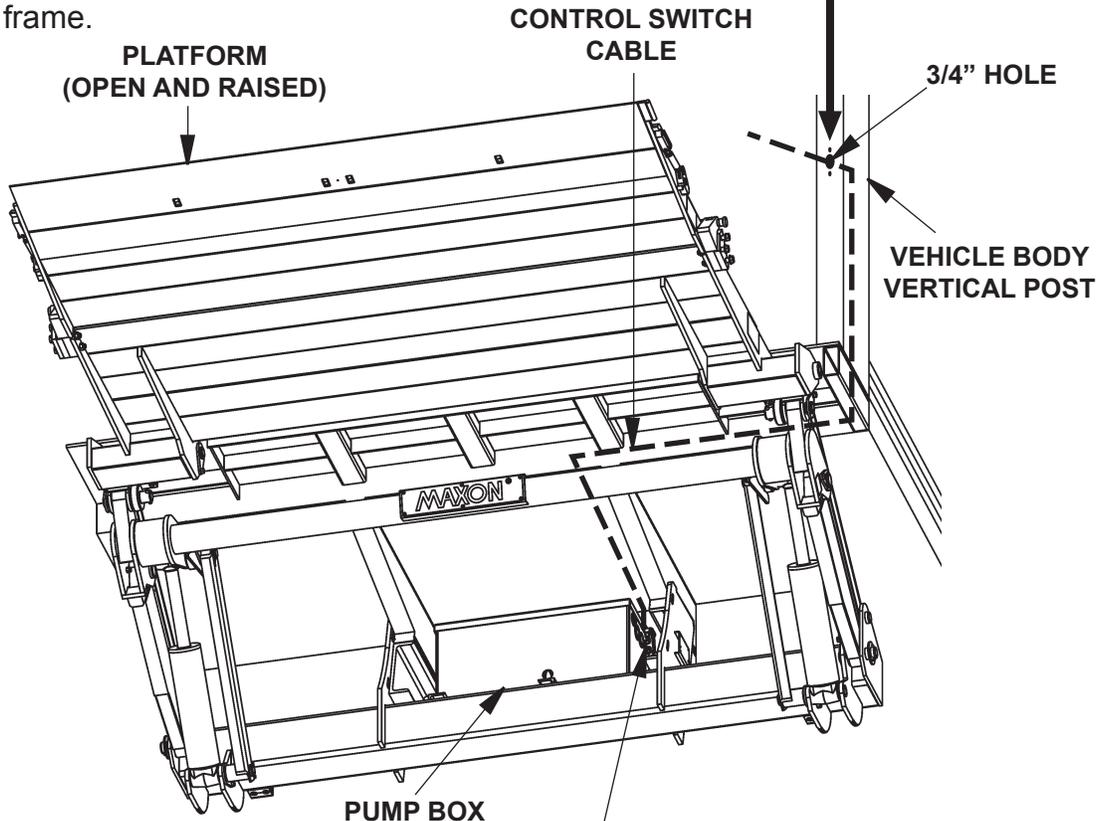

ROUTING CONTROL SWITCH WIRING
FIG. 17-1A

STEP 5 - INSTALL CONTROL SWITCH - Continued


CAUTION

Do not over-tighten the terminal nuts on starter solenoid. For the load terminals, torque nuts to 40 lbs.-in. max. Torque the nuts on #10-32 control terminals 15-20 lbs.-in.

NOTE: An extra crimp-on connector is supplied with the **RED** wire and **BLACK** wire on the control switch cable. Crimp each of the extra connectors to the correct wires shown in the illustration.

NOTE: MAXON recommends using dielectric grease on all electrical connections.

4. Open the pump box cover. Connect the **RED, BLACK, GREEN,** and **WHITE** wires from the control switch cable to pump wiring as shown in **FIG. 18-1**.

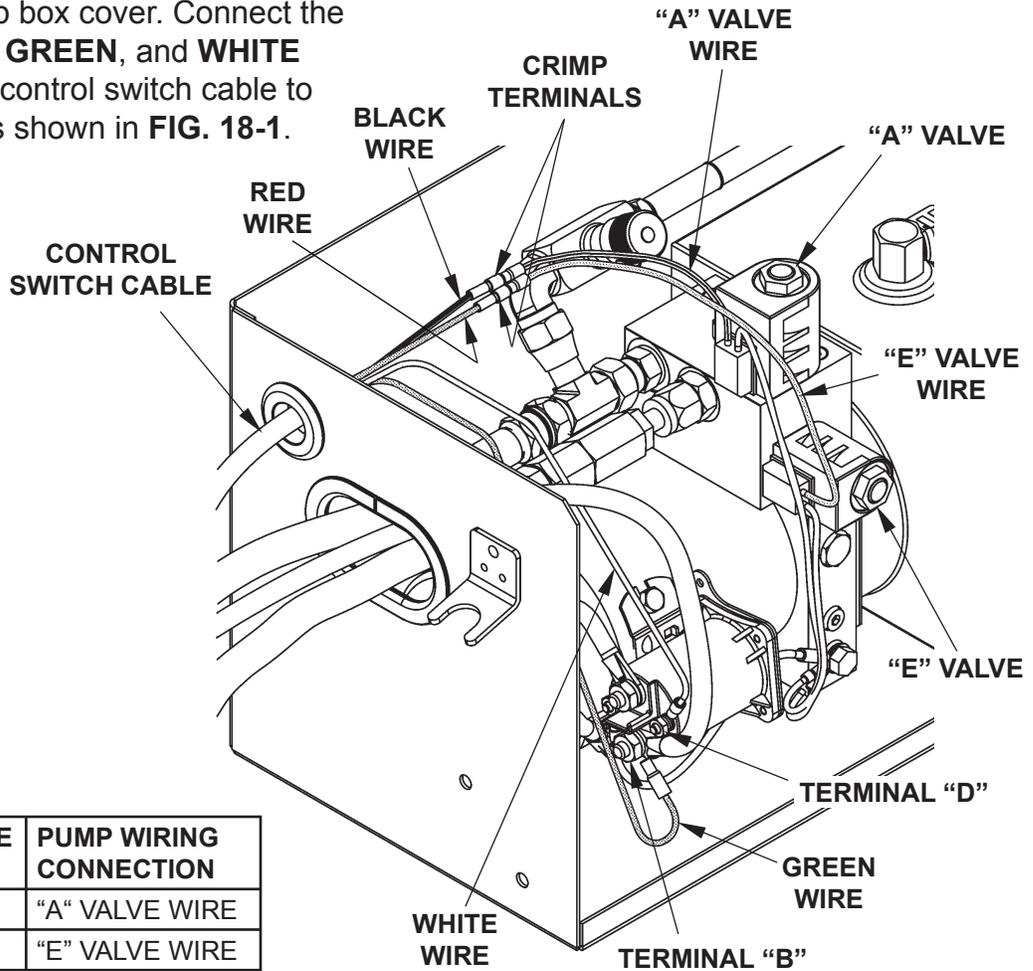

SWITCH CABLE WIRE COLOR	PUMP WIRING CONNECTION
BLACK	"A" VALVE WIRE
RED	"E" VALVE WIRE
GREEN	TERMINAL "B"
WHITE	TERMINAL "D"

**WIRING CONNECTIONS
TABLE 18-1**

**CONNECTING CONTROL SWITCH
CABLE TO PUMP WIRING
FIG. 18-1**

STEP 6 - CONNECT POWER CABLE TO BATTERY

NOTE: MAXON recommends using dielectric grease on all electrical connections.

Remove nut from positive (+) battery terminal connector. Connect power cable to the positive (+) battery terminal connector (**FIG. 19-1**). Re-install and tighten nut.

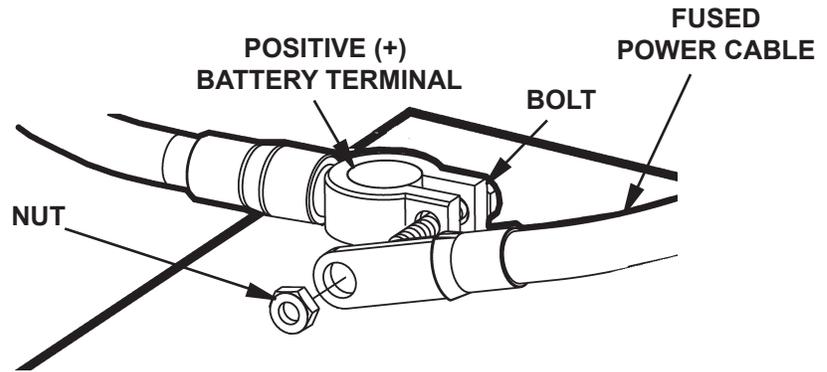


FIG. 19-1

STEP 7 - REMOVE LOCKING ANGLES & KNUCKLE BOLTS


CAUTION

Check for leaking hydraulic fluid as the system is being pressurized. If there is leakage, stop & correct the problem before fully pressurizing the system.

1. Push control switch to **UP** position to pressurize hydraulic system. Listen for hydraulic fluid flowing through the system. Check for fluid leaks. When the sound of flowing fluid stops, release control switch. Hydraulic system is ready.

NOTE: To operate Liftgate, locking angles must be removed from the hydraulic cylinders and shipping bolt must be removed from both knuckles.

2. Remove locking angles from hydraulic cylinders (**FIG. 20-1A**).
3. With platform open (**FIG. 20-1A**), unbolt each knuckle as shown in **FIGS. 20-1B**.

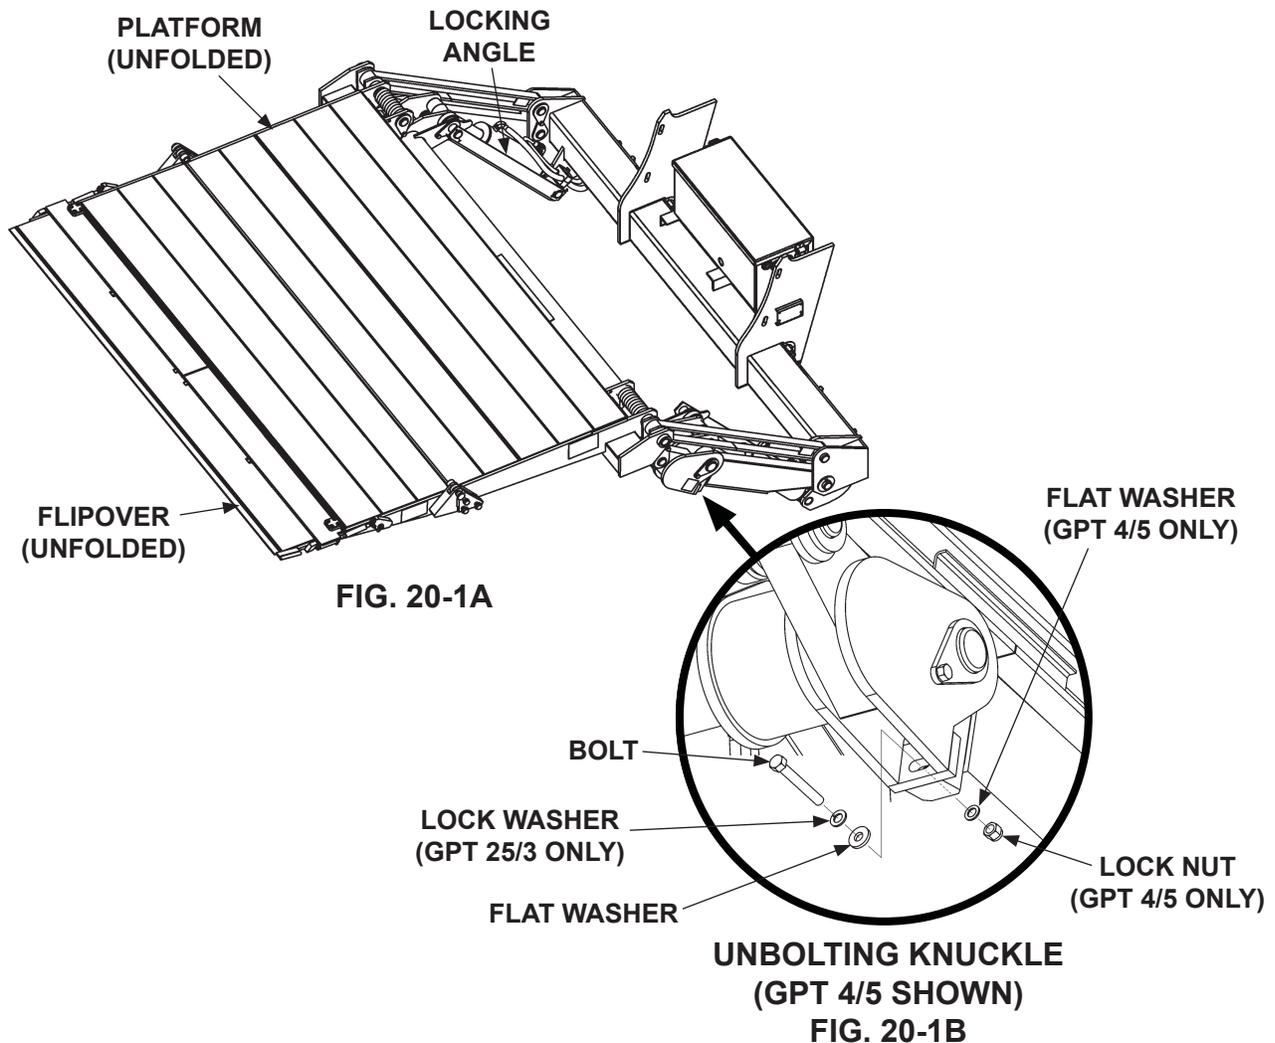

STEP 8 - WELD PLATFORM OPENER TO LIFTGATE

1. Remove floor jack and hoist supporting Liftgate (**FIG. 21-1**).

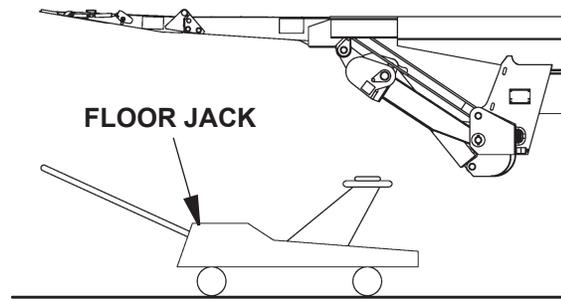


FIG. 21-1

2. Lower the platform to the ground. Remove both support straps and both spacers from extension plate (**FIG. 21-2**).


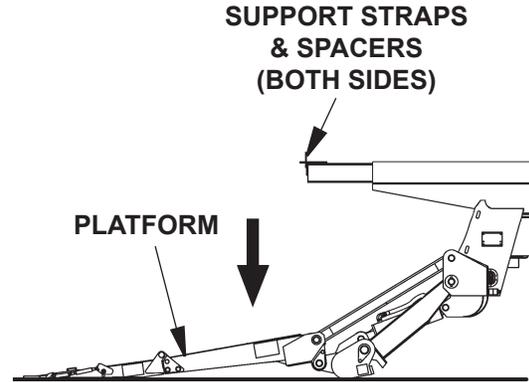


FIG. 21-2

3. Fold flipover (**FIG. 21-3**).

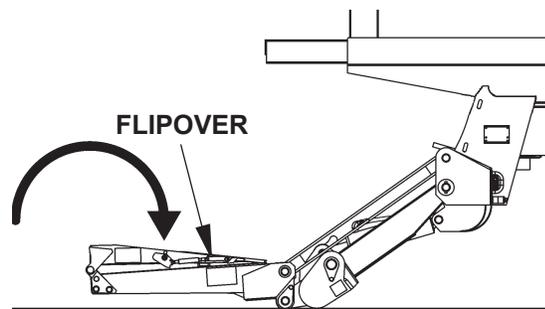


**FOLDING FLIPOVER
FIG. 21-3**

STEP 8 - WELD PLATFORM OPENER TO LIFTGATE - Continued

NOTE: Platform opener may only be installed on right hand side of main frame (see the illustrations on this page).

4. Position the opener on main frame as shown in **FIG. 22-1**.

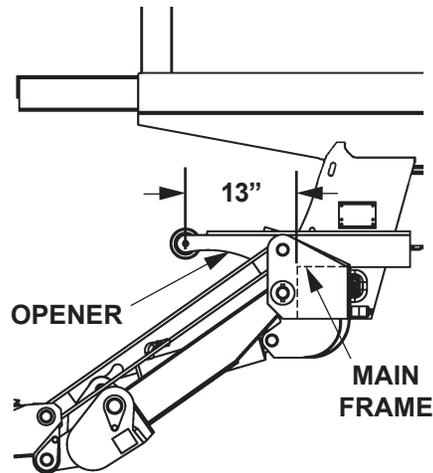

**POSITIONING OPENER
FIG. 22-1**

5. Fold the platform against opener (**FIG. 22-2A**). Make sure opener is entered on protective plate as shown in **FIG. 22-2B**. Reposition the opener if necessary. Clamp opener to main frame.

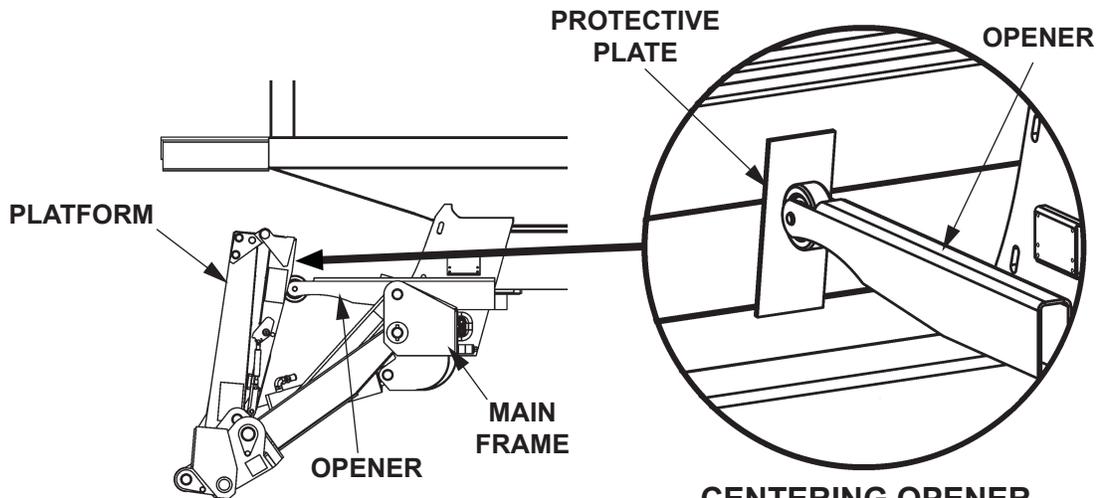



FIG. 22-2A

**CENTERING OPENER
ON PLATE
FIG. 22-2B**

STEP 8 - WELD PLATFORM OPENER TO LIFTGATE - Continued

⚠ CAUTION

If there is any interference with the platform while stowing Liftgate, check for damage on bottom of platform, flipover, and the hinge in between. A damaged platform or flipover may result in personal injury and more damage to Liftgate.

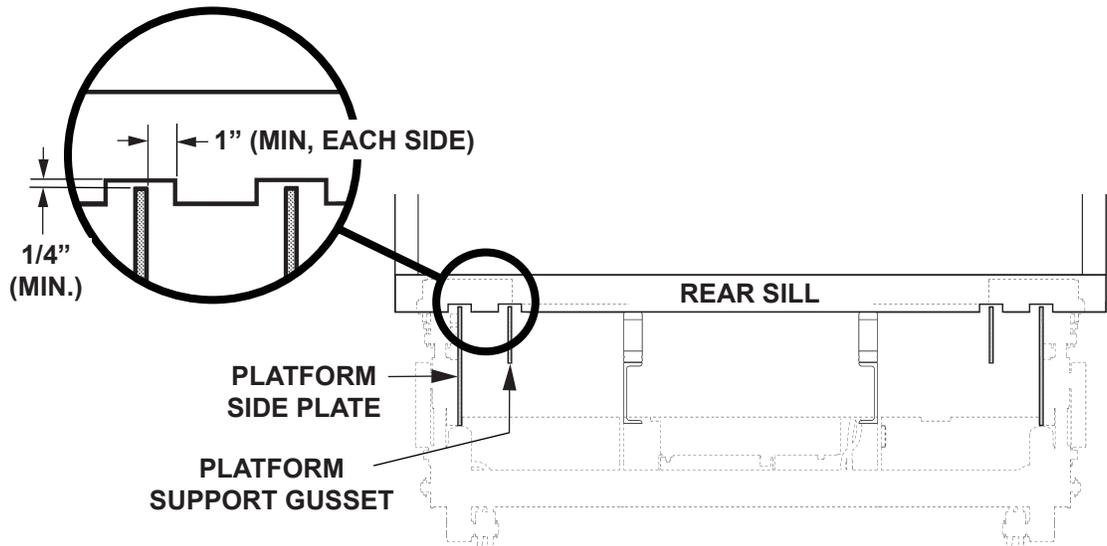


NOTE: If the rear sill was over 4" in height and had to be modified, check those modified areas for the minimum clearances shown in **FIG. 23-1**.

CHECKING FOR MINIMUM CLEARANCES BETWEEN PLATFORM & MODIFIED AREAS ON REAR SILL (EXTENSION PLATE NOT SHOWN)

FIG. 23-1

6. Stow and unfold Liftgate several times to verify there is no interference. If there is no interference, weld opener to main frame (**FIG. 23-2**).

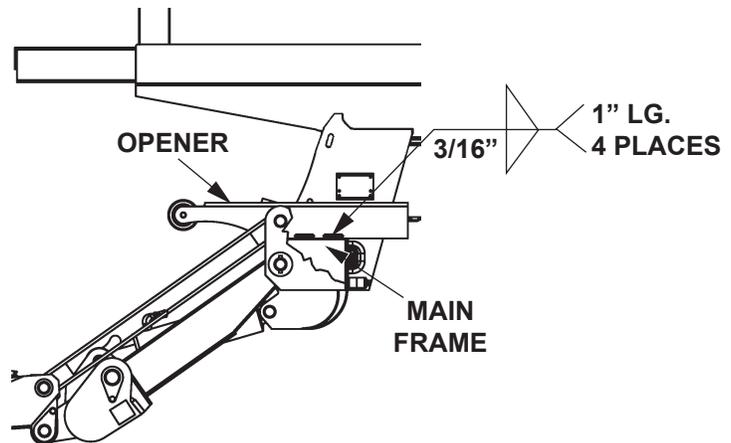

**WELDING OPENER TO MAIN FRAME
FIG. 23-2**


7. If the platform lowered with a "jerk-ing" motion, bleed air from the hydraulic system by doing the following. Push the control switch to the **DOWN** position until you hear air escaping into the hydraulic fluid reservoir. Raise the platform and then repeat this step until there is no air left in the system and platform lowers smoothly.

STEP 9 - FINISH WELDING LIFTGATE TO VEHICLE


CAUTION

Prevent damaged hydraulic hoses. Before welding next to hydraulic hoses, protect the hoses with a heat-resistant cover such as a welding blanket.

1. Weld each of the two mounting plates to vehicle frame (FIG. 24-1A).

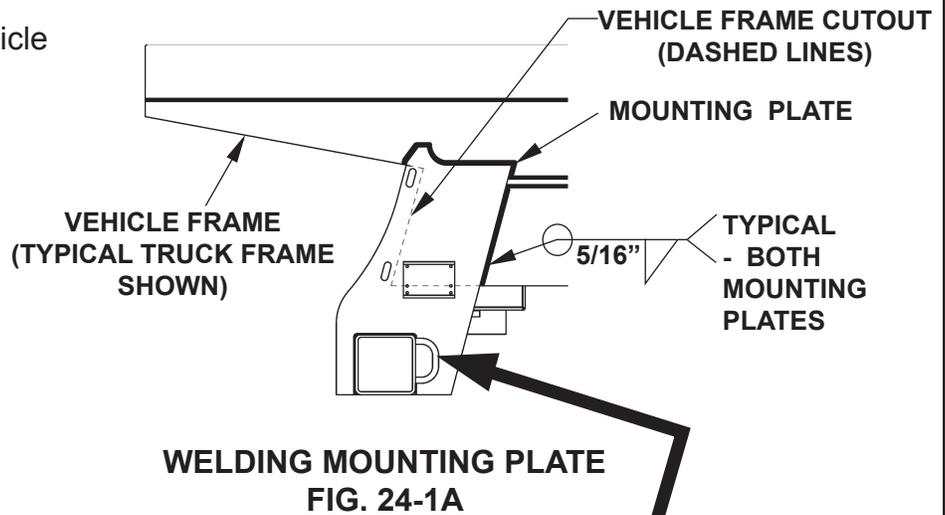

2. After welding is done and mounting plates are cool, remove the 4 fiberglass sleeves shown in FIG. 24-1B. Next, reinstall the split looms removed in STEP 3 (FIG. 24-1B).

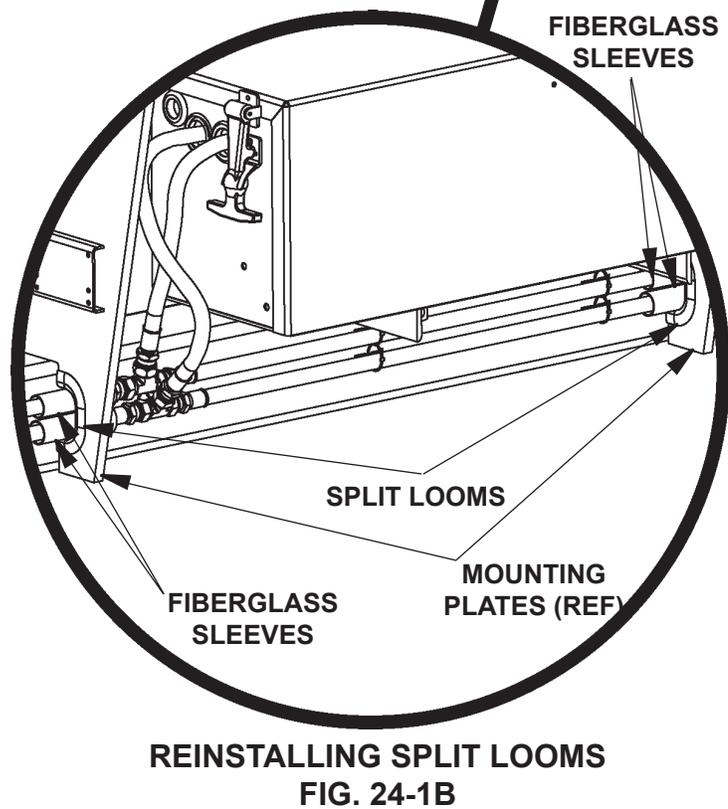


STEP 10 - INSTALL & ADJUST SADDLES

⚠ CAUTION

Make sure mounting plates are cooled before installing saddles. Hot surface could result in personal injury and damaged saddles.

1. Stow the platform as shown in **FIG. 25-1A**. Use floor jack positioned at center of platform (near hinge) to raise platform 1/8" above roller (**FIG. 25-1B**). Install saddle, bolts and lock nuts on RH side mounting plate (**FIG. 25-1A**). Repeat for saddle on LH side. Butt each saddle against platform, and tighten lock nuts.
2. Install saddle, bolts and lock nuts on RH side mounting plate (**FIG. 25-1A**). Repeat for saddle on LH side. Butt each saddle against platform, and tighten lock nuts.

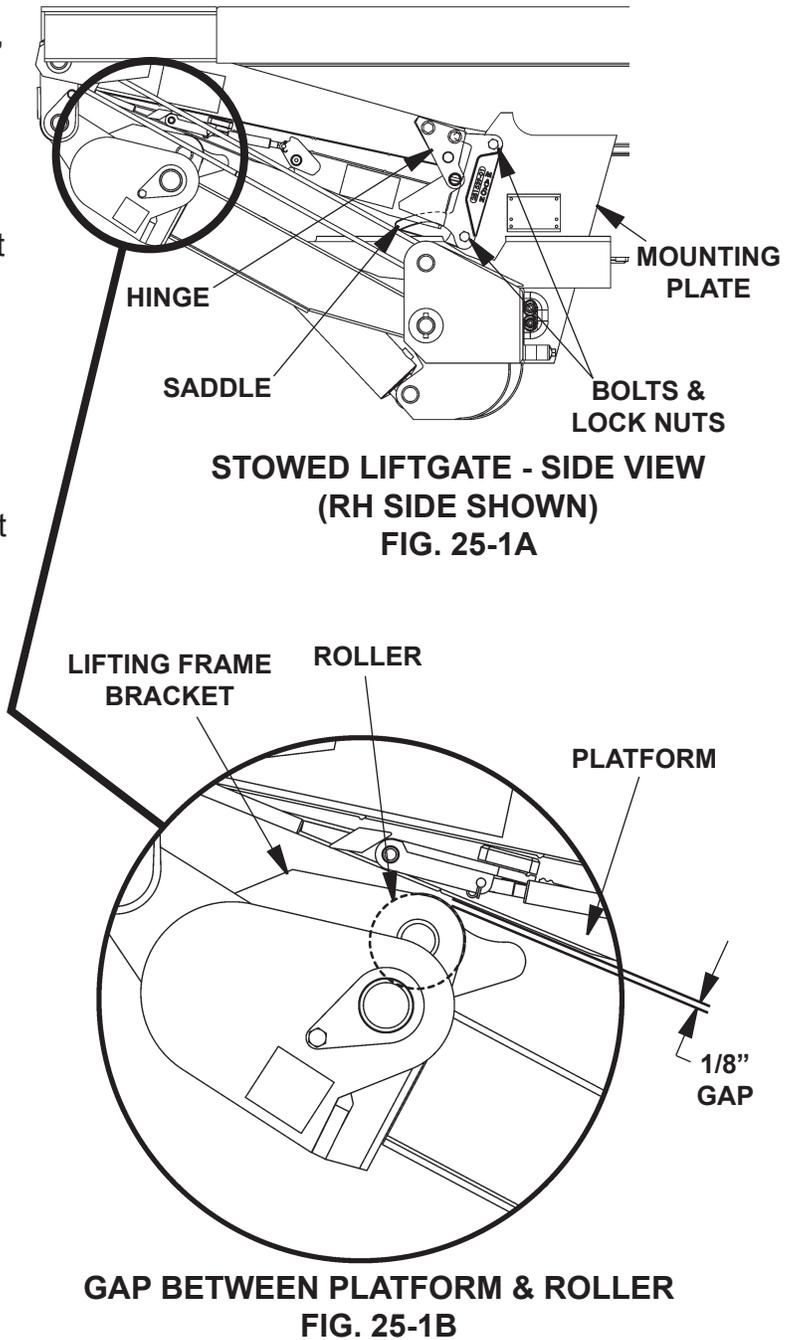


STEP 11 - WELD ON SADDLE SUPPORTS

CAUTION


Prevent damaged hydraulic hoses. Before welding next to hydraulic hoses, protect the hoses with a heat-resistant cover such as a welding blanket.

1. Position a support flat (Parts Bag item) against the bottom of the first saddle and weld as shown in **FIG. 26-1**. Repeat this step for the second saddle on LH side of Liftgate.

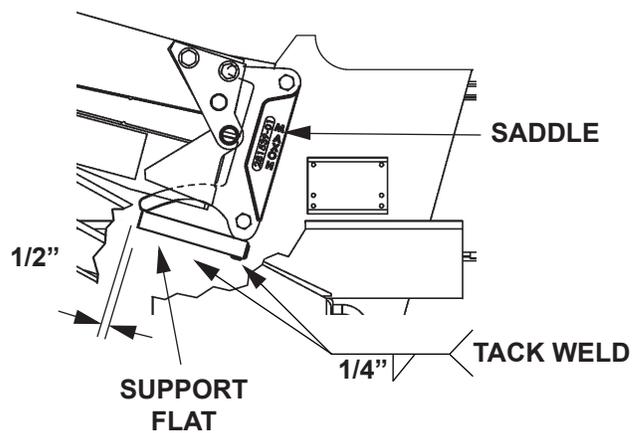

**TACK WELDING SUPPORT FLAT
TO MOUNTING PLATE
(RH SIDE SHOWN)
FIG. 26-1**


2. Lower the floor jack. Move floor jack to a place where it will not interfere with Liftgate or vehicle.
3. Lower platform to the ground. Unfold platform and flipover (**FIG. 26-2**).

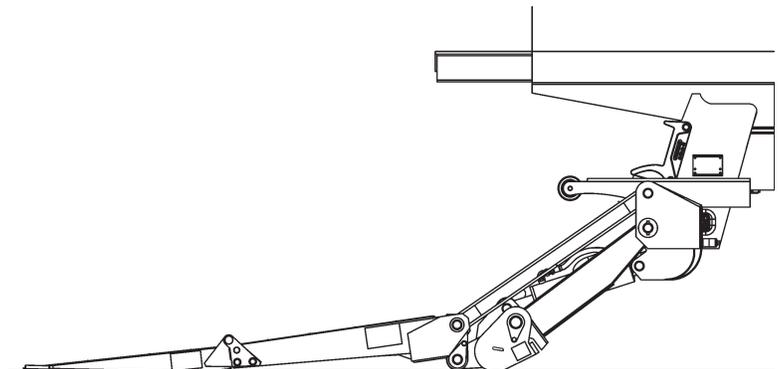

**PLATFORM & FLIPOVER UNFOLDED
AT GROUND LEVEL
FIG. 26-2**


STEP 11 - WELD ON SADDLE SUPPORTS - Continued

- Loosen upper bolt on the RH saddle. Then, remove the lower bolt (FIG. 27-1). Rotate saddle up and away from support flat (FIG. 27-1).

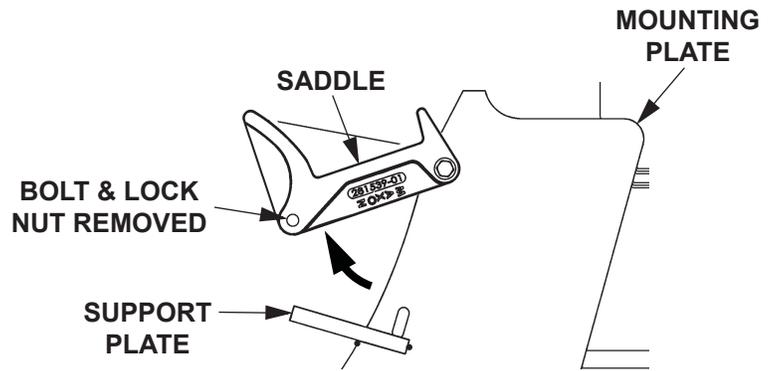


ROTATING SADDLE AWAY FROM
SUPPORT FLAT (RH SIDE SHOWN)
FIG. 27-1

- Weld support flat to mounting plate as shown in FIG. 27-2.

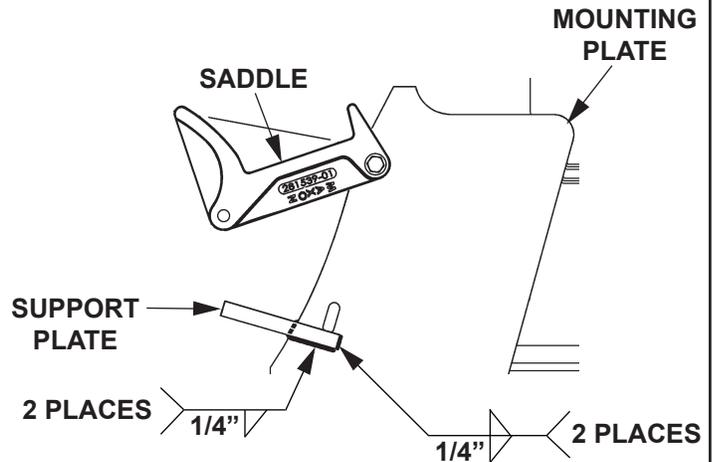

WELDING SUPPORT FLAT TO MOUNTING
PLATE (RH SIDE SHOWN)
FIG. 27-2

- When mounting plate is cool to the touch, rotate saddle into place against the support flat (FIG. 27-3). Bolt the saddle to mounting plate (FIG. 27-3). Tighten lock nuts and bolts.

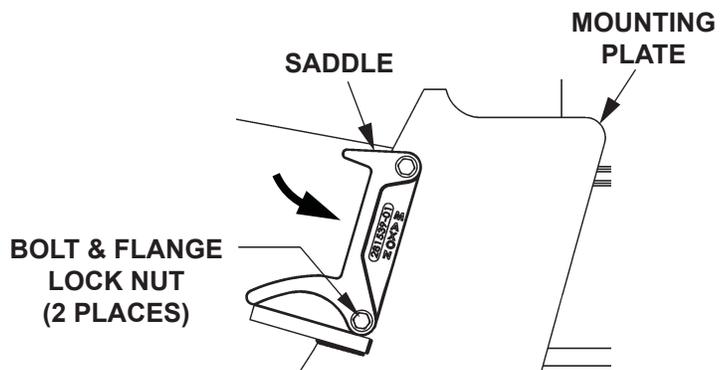


BOLTING SADDLE TO MOUNTING
PLATE (RH SIDE SHOWN)
FIG. 27-3

- Repeat steps 4 through 6 for the LH saddle.

STEP 12 - ADJUST PLATFORM (IF REQUIRED)


NOTE: Before doing the following procedure, make sure vehicle is parked on level ground.

1. With the platform and flipover unfolded, raise platform to bed level (**FIG. 28-1**). Measure how much the outboard edge of platform rises above bed level (**FIG. 28-1**). The outboard edge must be level or a maximum of 2" above bed level (**FIG. 28-1**). If indication is correct, Liftgate is installed correctly and no adjustment is needed. If the outboard edge is below bed level, do instructions **2, 3, and 6**. If outboard edge is higher than 2", do instructions **4 through 6**.

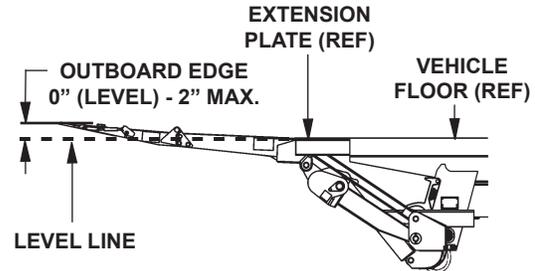

PLATFORM EDGE AT OR ABOVE BED LEVEL
FIG. 28-1

2. Compare measurement "A" (**FIG. 28-2**) with the distances and shims in **TABLE 28-1**. For example: If measurement "A" (**FIG. 28-2**) is 1" below level and you want to raise outboard edge of platform 1" above level, use 1/8" shim to raise 2" (**TABLE 28-1**).

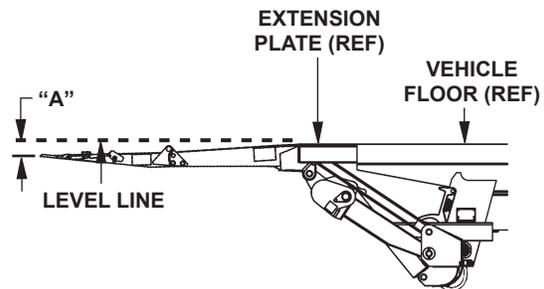


PLATFORM EDGE BELOW BED LEVEL
FIG. 28-2

RAISE PLATFORM EDGE (OUTBOARD) THIS DISTANCE ("A")	REQUIRED SHIM THICKNESS	WELD SIZE "W"
1"	1/16"	1/16"
2"	1/8"	1/8"
3"	3/16"	3/16"
4"	1/4"	1/4"

TABLE 28-1

3. Weld shims (Parts Bag item) on both platform stops (**FIG. 28-3**) to raise outboard edge of platform to correct position.

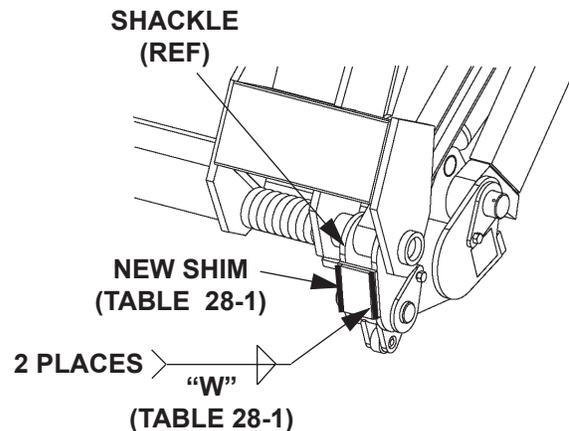

WELDING SHIMS (CURBSIDE SHOWN)
FIG. 28-3

STEP 12 - ADJUST PLATFORM - Continued


4. Compare measurement “B” (FIG. 29-1) with distances and grinding depths in TABLE 29-1. For example: If measurement “B” (FIG. 29-1) is 3” above bed level and you want to lower the outboard edge of platform to 1” above bed level, grind 1/8” from each platform stop (TABLE 29-1).

LOWER PLATFORM EDGE (OUTBOARD) THIS DISTANCE (“B”)	GRIND METAL FROM PLATFORM STOP
1”	1/16”
2”	1/8”
3”	3/16”
4”	1/4”


TABLE 29-1

5. Grind metal from platform stops (FIG. 29-2) to lower outboard edge of platform to correct position.


6. Lower the platform, then raise it to bed level. The outboard edge of platform should be level or up to 2” maximum above bed level (FIG. 29-3).

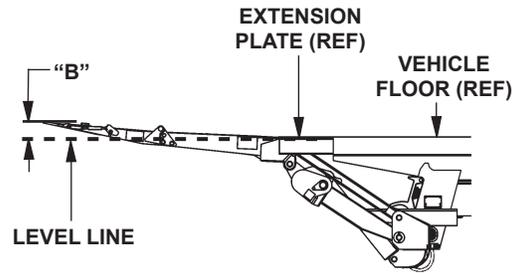

PLATFORM EDGE ABOVE BED LEVEL
FIG. 29-1

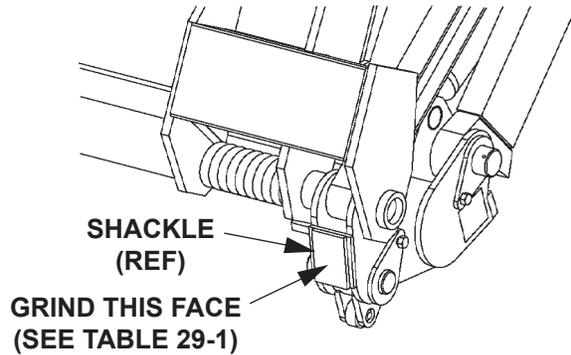

GRINDING PLATFORM STOPS
(CURBSIDE SHOWN)
FIG. 29-2

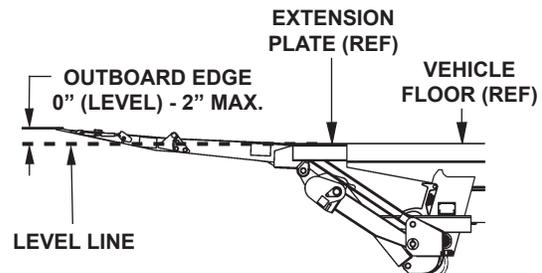

PLATFORM EDGE ABOVE BED LEVEL
FIG. 29-3

STEP 13 - CHECK HYDRAULIC FLUID

CAUTION

Keep dirt, water and other contaminants from entering the hydraulic system. Before opening the hydraulic fluid reservoir filler cap, drain plug and hydraulic lines, clean up contaminants that can get in the openings. Also, protect the openings from accidental contamination.


NOTE: Use correct grade of hydraulic fluid for your location.

+50 to +120 Degrees F - Grade ISO 32

Below + 70 Degrees F - Grade ISO 15 or MIL-H-5606

See **TABLES 30-1 & 30-2** for recommended brands.

1. Remove the filler cap (FIG. 30-1).

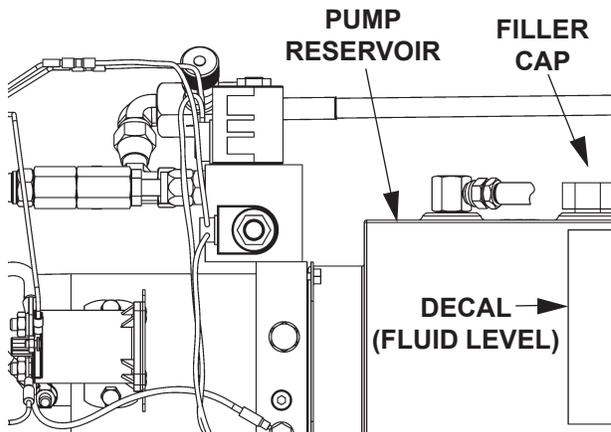

**CHECKING HYDRAULIC FLUID LEVEL
FIG. 30-1**

2. Check the hydraulic fluid level in the pump reservoir (FIG. 30-1). If fluid is below **FILL LEVEL** shown on decal on the pump reservoir (FIG. 30-1), add fluid to the **FILL LEVEL**.

3. Reinstall the filler cap (FIG. 30-1).

ISO 32 HYDRAULIC OIL	
RECOMMENDED BRANDS	PART NUMBER
AMSOIL	AWH-05
CHEVRON	HIPERSYN 32
KENDALL	GOLDEN MV
SHELL	TELLUS T-32
EXXON	UNIVIS N-32
MOBIL	DTE-13M, DTE-24, HYDRAULIC OIL-13


TABLE 30-1

ISO 15 OR MIL-H-5606 HYDRAULIC OIL	
RECOMMENDED BRANDS	PART NUMBER
AMSOIL	AWF-05
CHEVRON	FLUID A, AW-MV-15
KENDALL	GLACIAL BLU
SHELL	TELLUS T-15
EXXON	UNIVIS HVI-13
MOBIL	DTE-11M
ROSEMEAD	THS FLUID 17111

TABLE 30-2

STEP 14 - WELD HOOK AND EYE TO LIFTGATE

1. Stow the Liftgate under hydraulic pressure (FIG. 31-1).

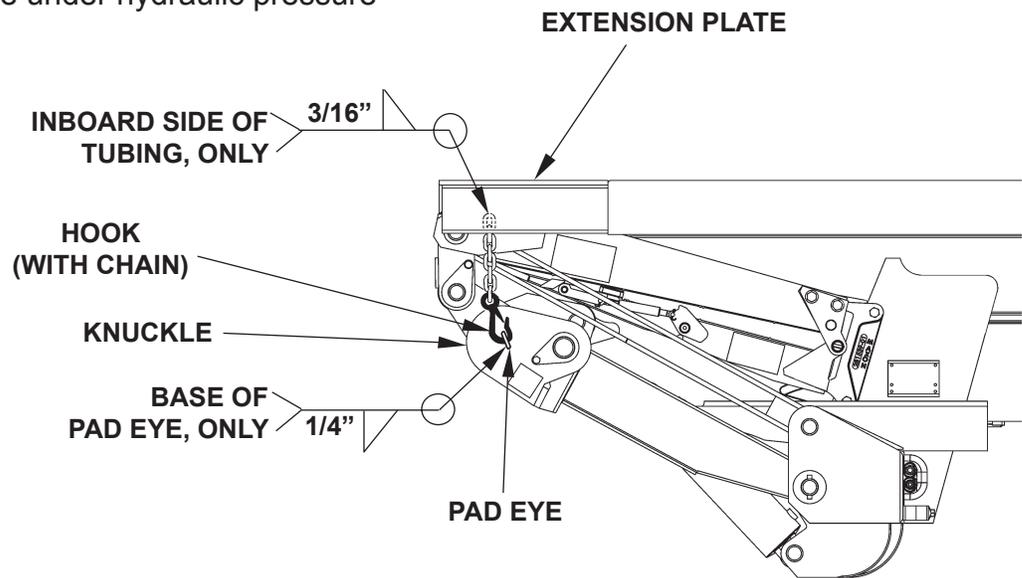


**RH SIDE VIEW OF STOWED LIFTGATE
FIG. 31-1**

2. Weld the pad eye (from installation Parts Pag) to knuckle as shown in FIG. 31-1.
3. Insert the safety hook through the pad eye (FIG. 31-1). Next, position the safety hook chain on the extension plate as shown in FIG. 31-1. Leave enough slack in the chain to hook and unhook the pad eye. Weld the free end of chain to the inboard side of the tubing on extension plate.

STEP 15 - WELD DOCK BUMPERS TO LIFTGATE

1. Lower the platform to the ground (see Operation Manual).
2. Clamp a dock bumper to left hand (LH) side of extension plate as shown in **FIG. 32-1A**. Weld the dock bumper to extension plate as shown in **FIG. 32-1B**. Make sure bolt holes in the dock bumper are visible from the rear of the vehicle. Repeat step for dock bumper on right hand (RH) side of extension plate.

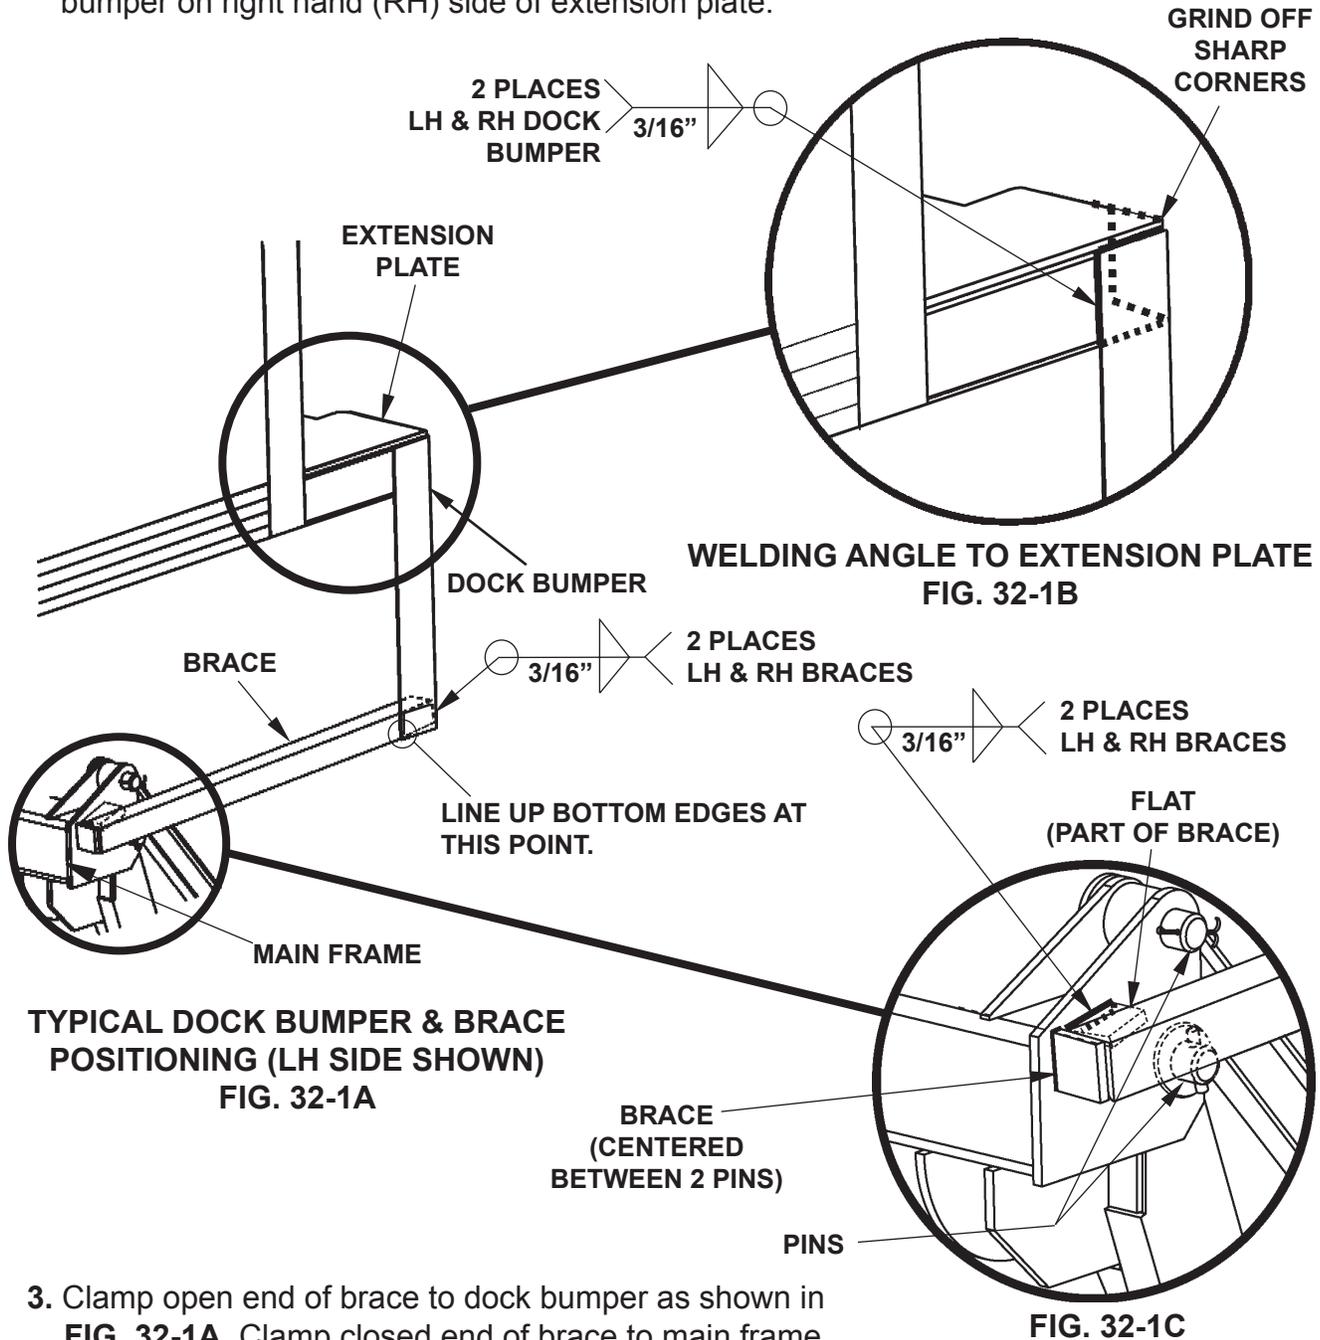


3. Clamp open end of brace to dock bumper as shown in **FIG. 32-1A**. Clamp closed end of brace to main frame (**FIG. 32-1A**). Weld the brace to dock bumper (**FIG. 32-1A**) and main frame (**FIG. 32-1C**). Repeat step for brace and dock bumper on RH side of extension plate.

4. Raise and lower platform. Next, stow Liftgate (see Operation Manual). Make sure dock bumper does not interfere with Liftgate.

STEP 16 - BOLT RUBBER BUMPERS TO LIFTGATE

NOTE: The rubber dock bumpers kit P/N 203410 contains 2 rubber bumpers and 2 sets of fasteners.

Bolt a rubber bumper to each of the 2 dock bumpers (FIG. 33-1).

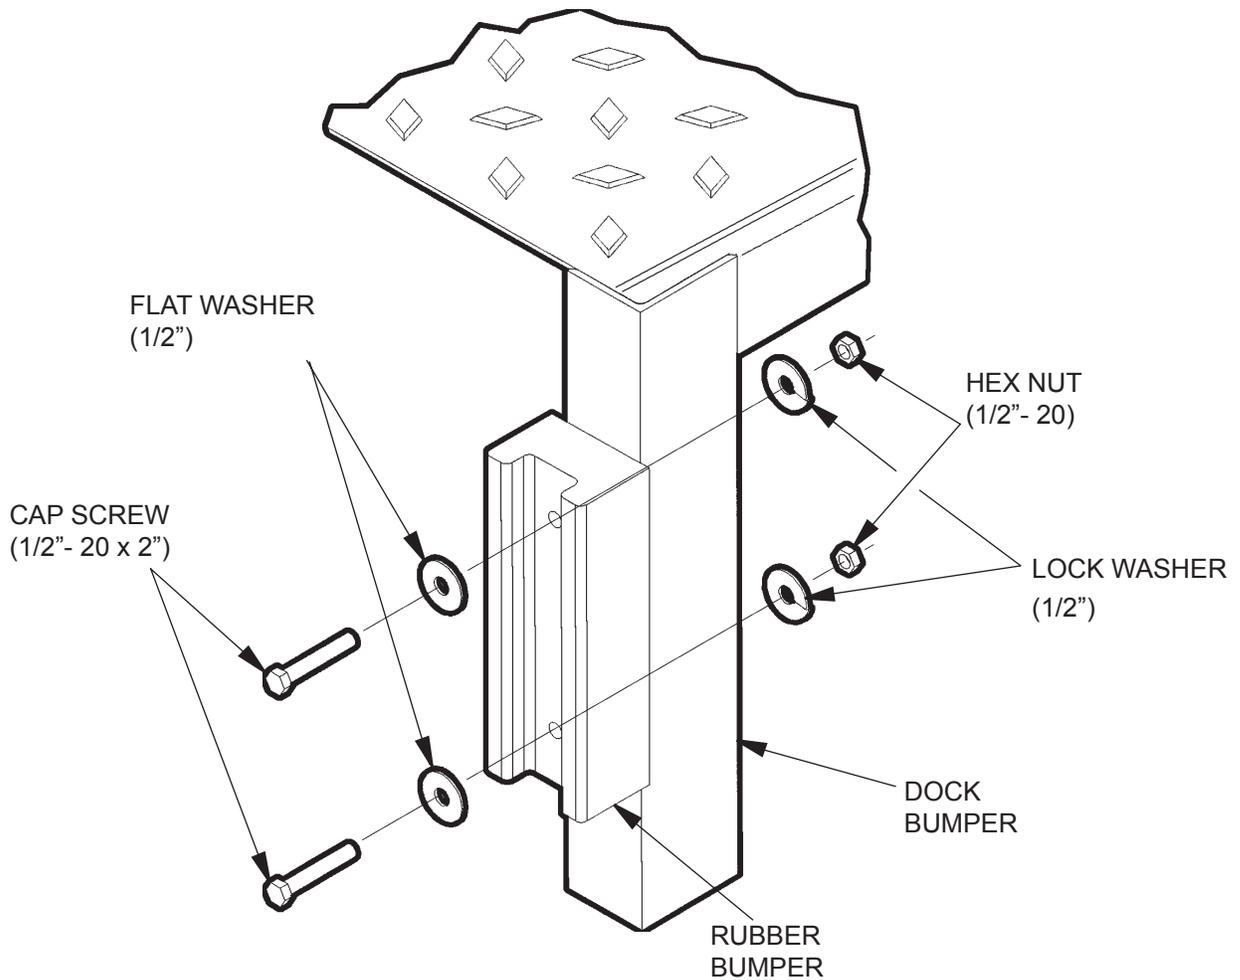


**BOLTING RUBBER BUMPER TO DOCK BUMPER
(RIGHT HAND SIDE DOCK BUMPER SHOWN)**

FIG. 33-1


STEP 17 - VEHICLE TAILLIGHT POSITIONING (IF REQUIRED)

NOTE: Positions are based on using taillights of 6-3/4" height by 5-3/4" width. Larger taillights may interfere with Liftgate. Taillights and attaching hardware are not provided with the Liftgate. Underride is optional equipment.


Install vehicle taillights (FIG. 34-1) as shown in FIG. 34-2 and FIG. 34-3.

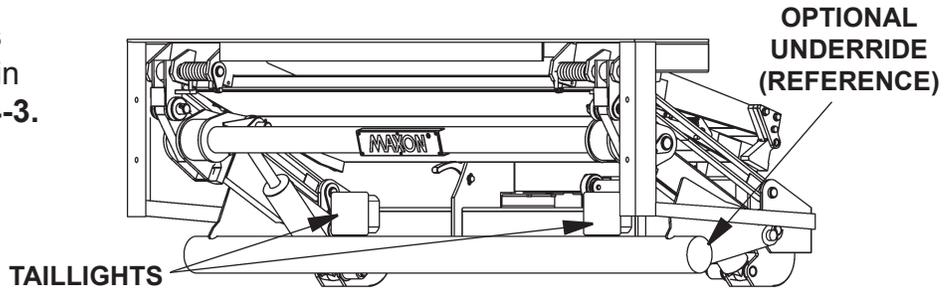

**VEHICLE TAILLIGHTS INSTALLED ON LIFTGATE
FIG. 34-1**

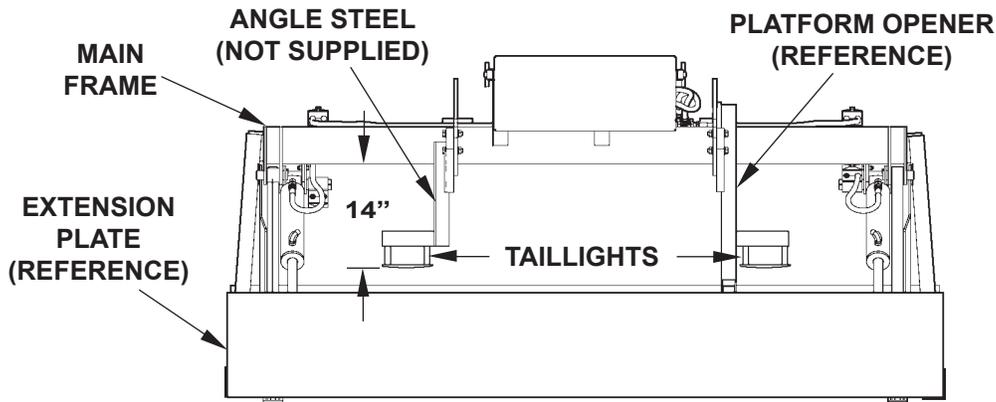

**TAILLIGHTS POSITION (TOP VIEW)
FIG. 34-2**

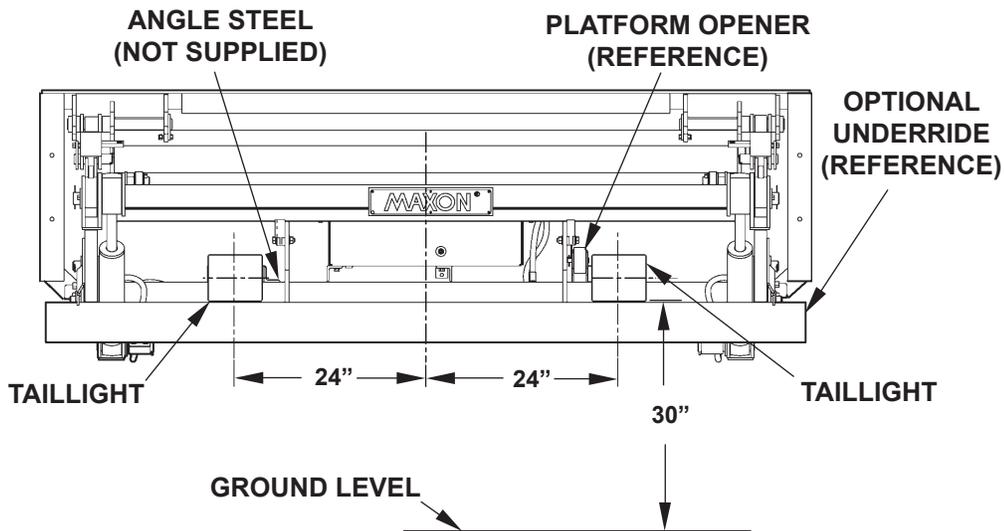

**TAILLIGHTS HORIZONTAL SPACING (FRONT VIEW)
FIG. 34-3**



ATTACH DECALS




DECAL "H" (2 PLACES)
P/N 268308-01



PAINT DECAL
P/N 267338-01

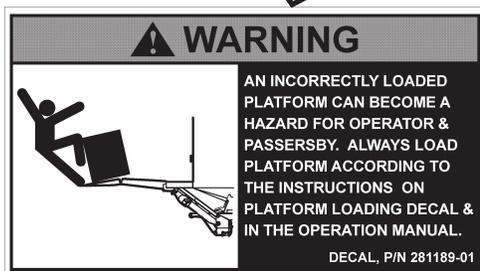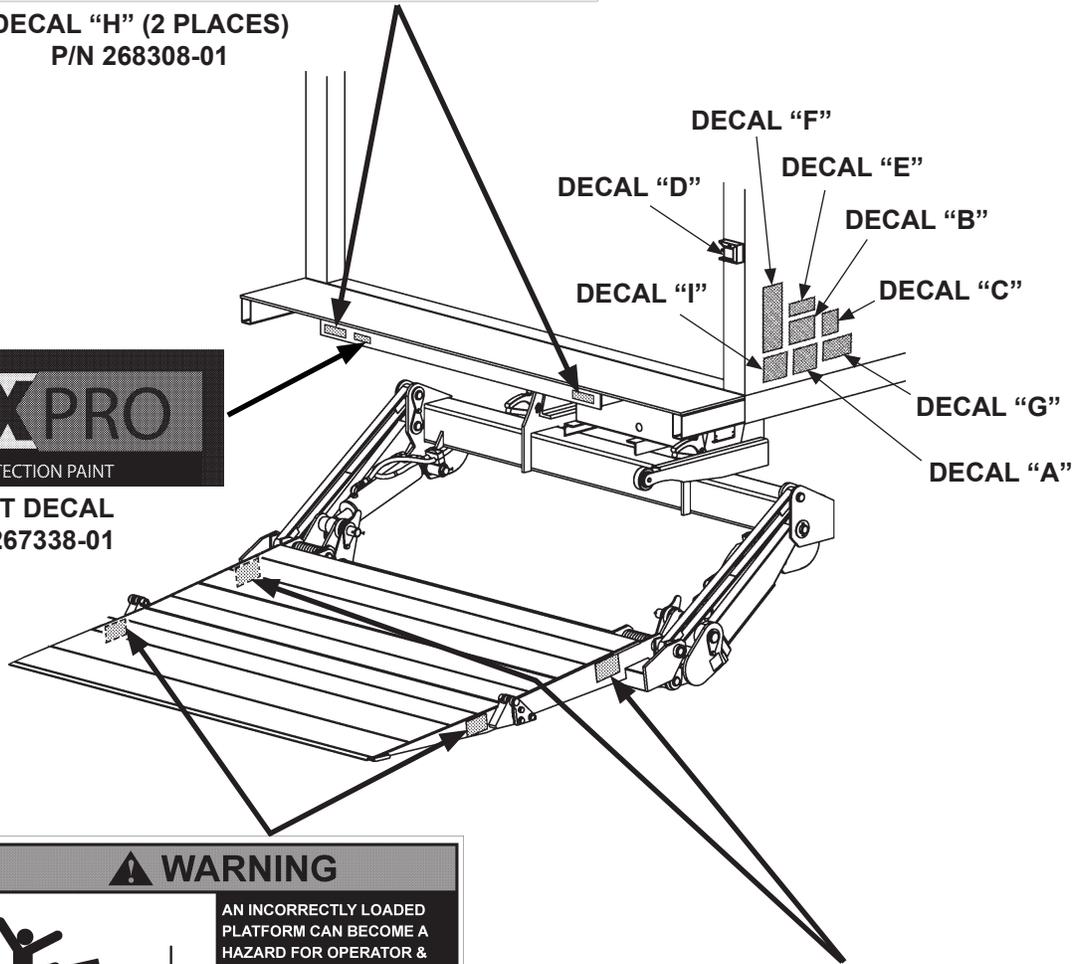

PLATFORM WARNING DECAL
(2 PLACES)
P/N 281189-01

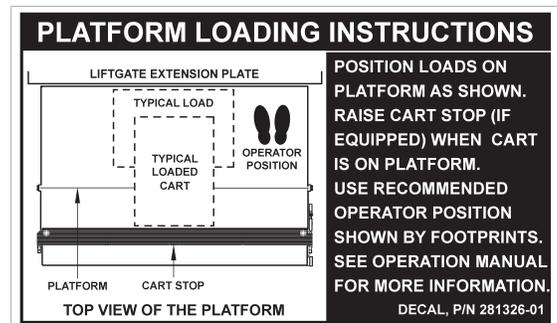

PLATFORM LOADING DECAL
(2 PLACES)
P/N 281326-01

FIG. 35-1

ATTACH DECALS - Continued

SAFETY INSTRUCTIONS

Read all decals and operation manual before operating liftgate.

1. Do not use liftgate unless you have been properly instructed and have read, and are familiar with, the operating instructions.
2. Be certain vehicle is properly and securely braked before using the liftgate.
3. Always inspect this liftgate for maintenance or damage before using it. Do not use liftgate if it shows any sign of damage or improper maintenance.
4. Do not overload
5. Make certain the area in which the platform will open and close is clear before opening or closing the platform.
6. Make certain platform area, including the area in which loads may fall from platform, is clear before and at all times during operation of liftgate.
7. This liftgate is intended for loading and unloading of cargo only. Do not use this liftgate for anything but its intended use.

A

WARNING


Read this information carefully.

- Improper operation of this Liftgate can result in serious personal injury. If you do not have a copy of the operating instructions, please obtain them from your employer, distributor, or lessor before you attempt to operate Liftgate.
- If there are signs of improper maintenance, damage to vital parts, or slippery platform surface, do not use the Liftgate until these problems have been corrected.
- If you are using a pallet jack, be sure it can be maneuvered safely.
- Do not operate a forklift on the platform.
- Do not allow any part of yours or your helper's body to be placed under, within, or around any portion of the moving Liftgate, or its mechanisms, or in a position that would trap them between the platform and the ground or truck when the Liftgate is operated.
- If a helper is riding the platform with you, make sure you are both doing so safely and that you are not in danger of coming in contact with any moving or potentially moving obstacles.
- **USE GOOD COMMON SENSE.**
- If load appears to be unsafe, do not lift or lower it.

For a free copy of other manuals that pertain to this model Liftgate, please visit our website at www.maxonlift.com or call Customer Service at (800) 227-4116.

I

CAUTION

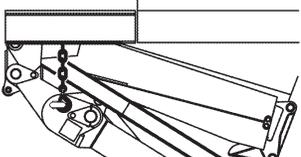

Avoid possible injury & damage. Make certain chain is hooked to pad eye when platform is stowed.

C

CAUTION

Always stand clear of platform area.

E

THE MAXIMUM CAPACITY OF THIS LIFT IS

_____ POUNDS

WHEN THE LOAD IS CENTERED ON THE LOAD CARRYING PLATFORM

B

(See TABLE 36-1)

WARNING

Liftgate hazards can result in crushing or falling.


Keep hands and feet clear of pinch points.

If riding liftgate, make sure load is stable and footing is solid.

G

Read and understand all instructions and WARNINGS before use.

UP



DOWN

D

OPERATING INSTRUCTIONS

GPT Series Liftgates

- 1 Unhook safety chain. (See CAUTION decal.)
- 2 Push control switch. (Must touch the ground)
- 3 Unfold platform.
- 4 Unfold flipover.
- 5 Use switch to raise or lower.
- 6 To tuck liftgate away, reverse steps 1, 2, 3, & 4.

F

**DECAL SHEET
FIG. 36-1**

MODEL	DECAL SHEET P/N	DECAL "B"
GPT-25	268308-01	2500 POUNDS
GPT-3	268308-02	3000 POUNDS
GPT-4	268308-03	4000 POUNDS
GPT-5	268308-04	5000 POUNDS

**DECAL SHEET
TABLE 36-1**

MAXON 11921 Slauson Ave. Santa Fe Springs, CA. 90670 (800) 227-4116 FAX (888) 771-7713

36

TOUCHUP PAINT

CAUTION

Damaged cylinder seals and contaminated hydraulic fluid can result from painting the polished portion of the cylinder rod. To prevent damage, protect the exposed polished portion of the cylinder rod while painting.

If bare metal or primer is exposed on the painted portions of the Liftgate, touch up the paint. To maintain the protection provided by the original paint system, **MAXON** recommends aluminum primer touchup paint kit, P/N 908119-01.

HYDRAULIC SYSTEM DIAGRAM

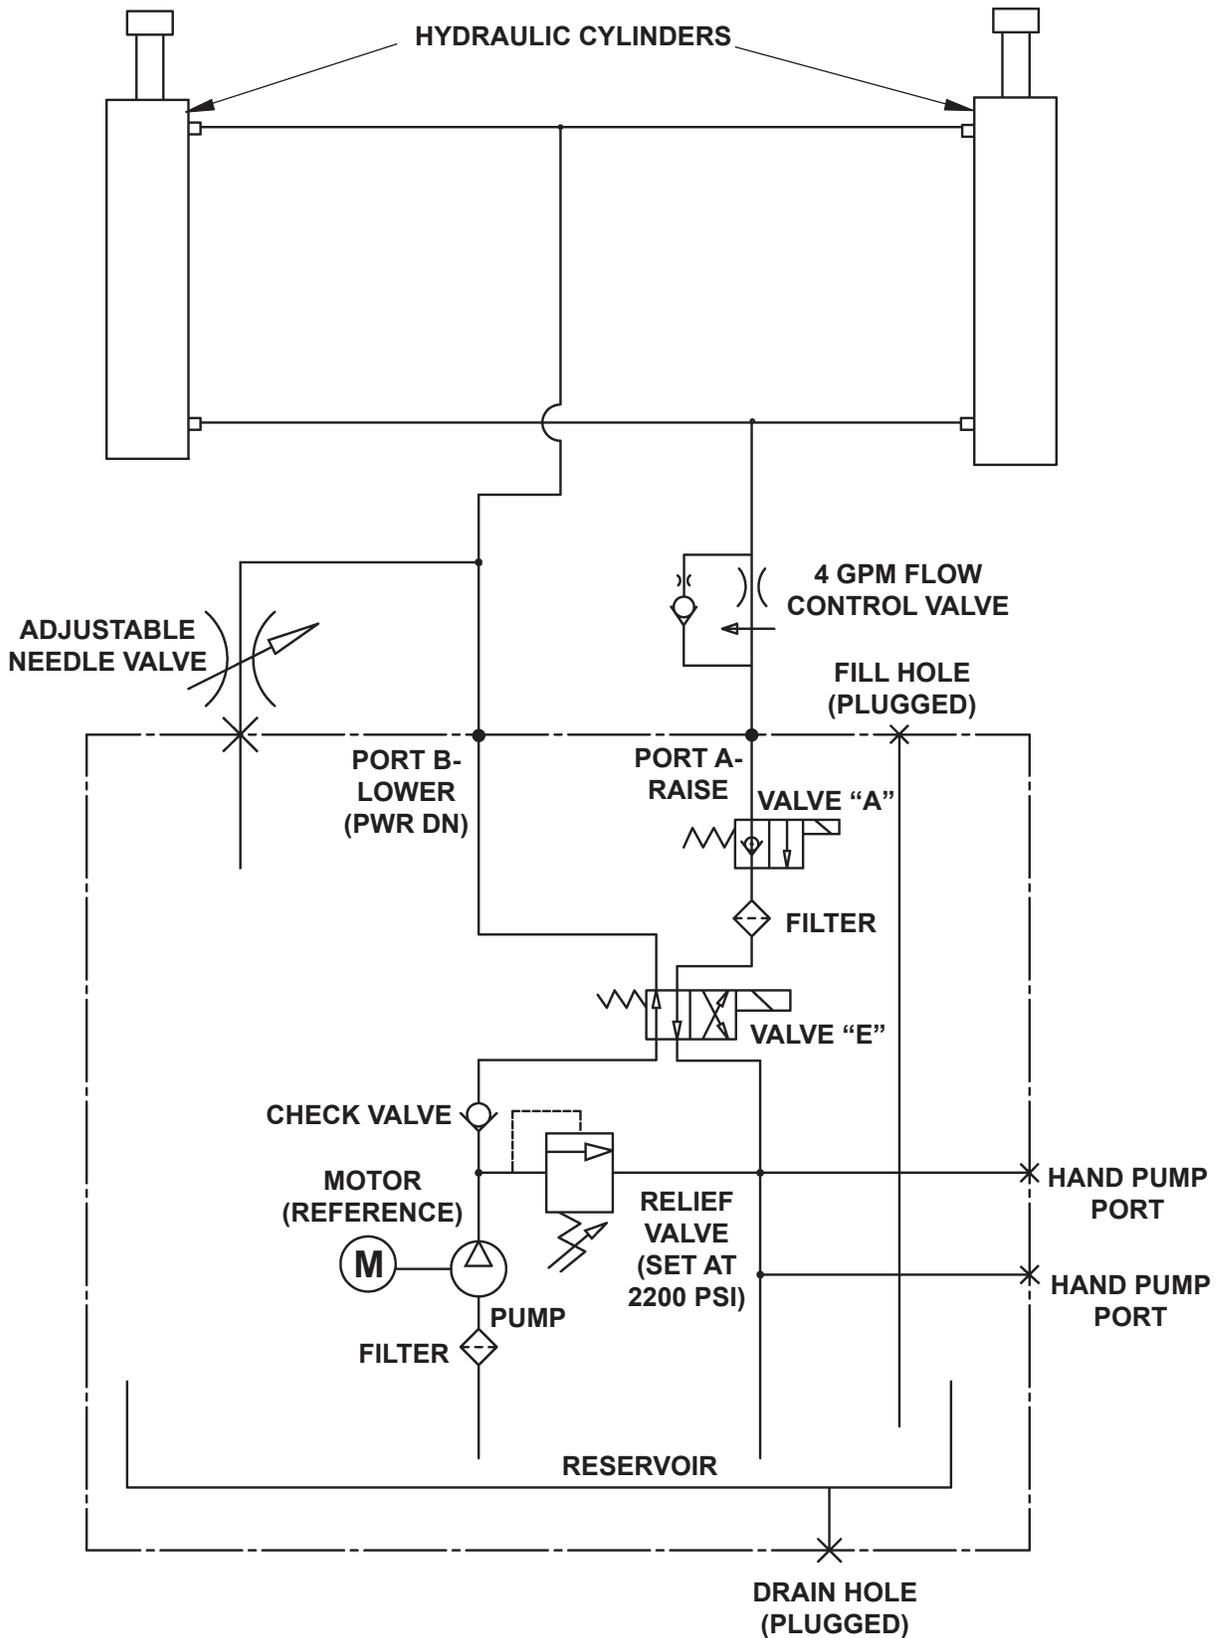


FIG. 38-1

ELECTRICAL SYSTEM DIAGRAM

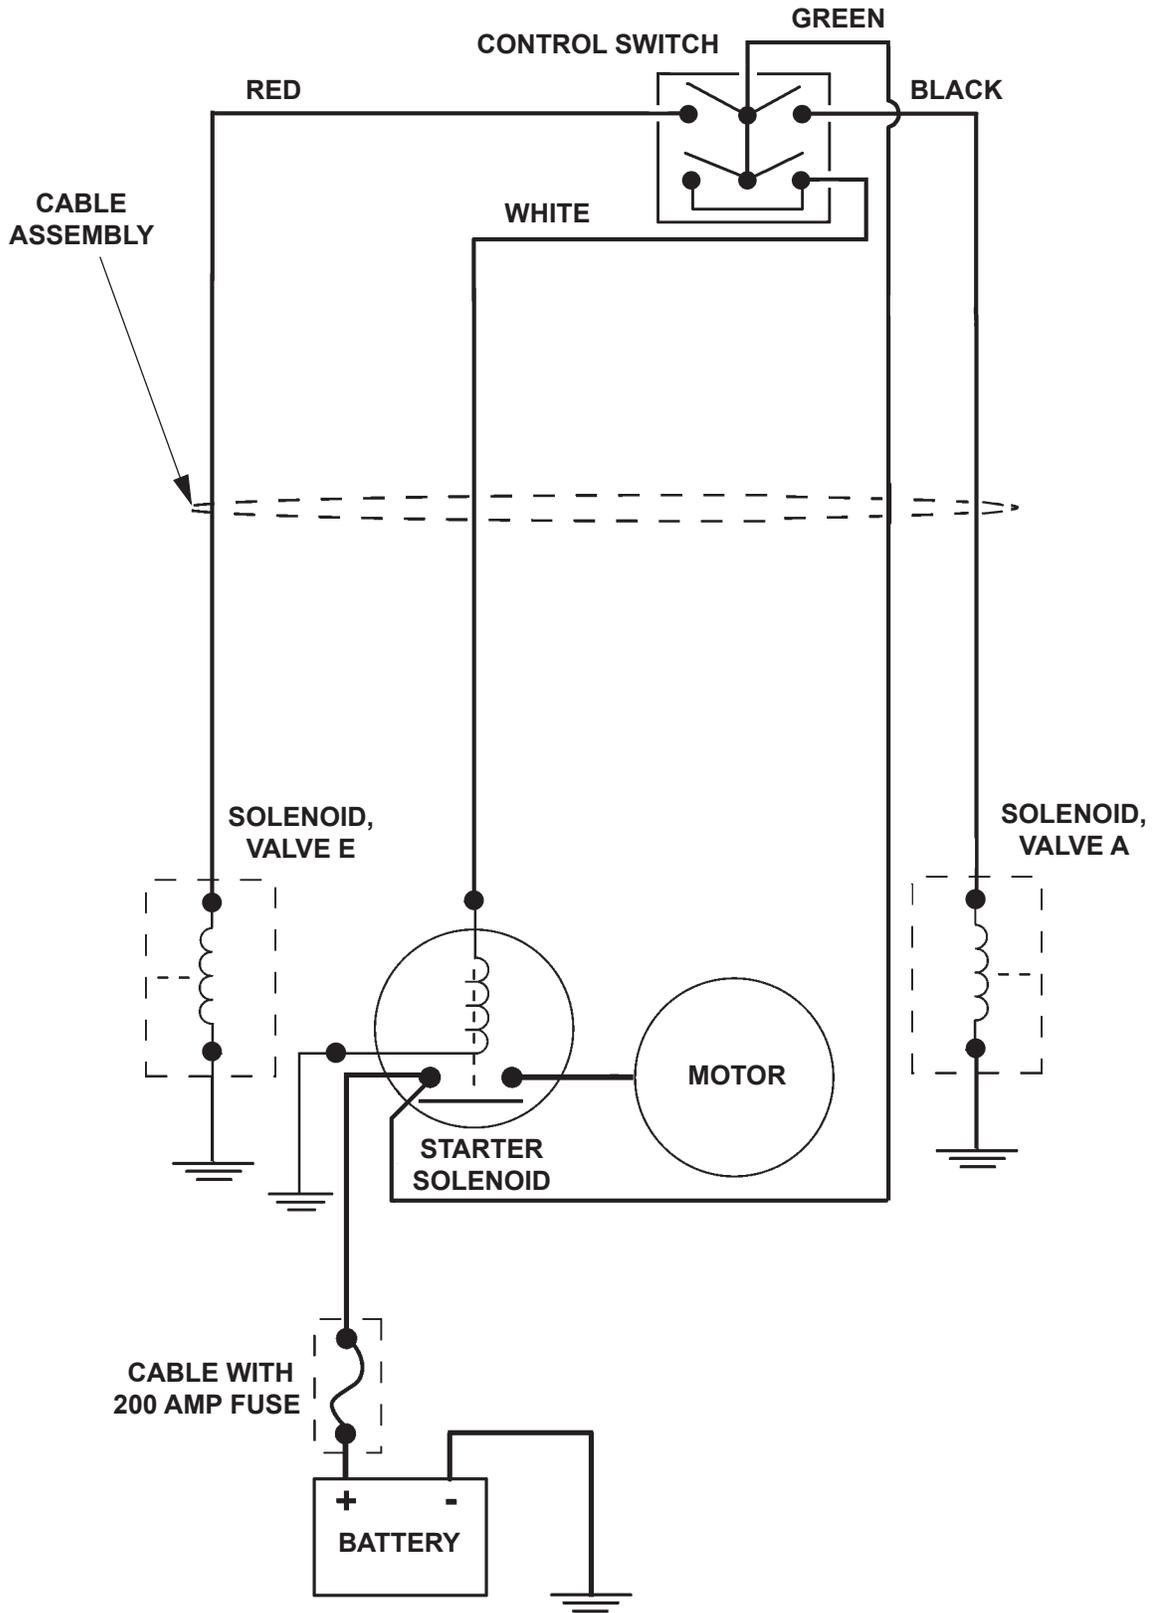


FIG. 39-1

OPTIONS

OPTIONAL LIFTGATE COMPONENTS


MISCELLANEOUS KITS	PART NUMBER
IN CAB ON-OFF SWITCH	250477
LOW VOLTAGE SWITCH (LVS), GPT	267494-01
FRAMELESS TRAILER SUBFRAME MOUNTING KIT	280010
102" WIDE TRAILER	263552
CIRCUIT BREAKER (150 AMP)	251576
HAND PUMP, GPT POWER DOWN	267491-01
GREASE-ABLE PINS (GPT-25 & GPT-3 ONLY)	281946-01
EXTRA CONTROLS & CONTROL KITS	
CONTROL STATION, POWER UP & DOWN (120" LG)	229068
CONTROL STATION, POWER UP & DOWN (144" LG)	229068-01
CONTROL STATION, POWER UP & DOWN, COILED CORD (20' LG)	229068-102
HAND HELD CONTROL, POWER DOWN	263260-04
STREET SIDE CONTROL, 4-WIRE MOLDED SWITCH	265378
DUAL SWITCH CONTROL, 4-WIRE MOLDED SWITCH	265380
BUMPER/UNDERRIDE KITS	
UNDERRIDE (GPT-4 & GPT-5 ONLY)	266043-01
UNDERRIDE (GPT-25 & GPT-3 ONLY)	266042-01
LIFTGATE BUMPER (ALL GPT MODELS)	265860-01
2 STEP DOCK BUMPER	
DOCK BUMPER, 2-STEP	266220-01
BATTERY BOX KITS	
TRUCK BATTERY BOX WITHOUT BATTERY (FOR 6V BATTERY)	251154-03
TRUCK BATTERY BOX WITHOUT BATTERY (FOR 12V BATTERY)	251154-05
TRAILER CHARGE LINE KITS	
TRAILER, SINGLE POLE CHARGE LINE	280275-01
TRAILER, DUAL POLE CHARGE LINE	280275-02
TRAILER SINGLE & DUAL POLE CHARGE LINE	280275-06
TRAIL CHARGER	267370-01
HIGH PERFORMANCE CHARGER	267850-01
TRACTOR CHARGE LINE KIT	
TRACTOR SINGLE POLE CHARGE LINE	280275-03
TRACTOR DUAL POLE CHARGE LINE	280275-04
TRACTOR CHARGE LINE WITH ADAPTER	280275-05
EXTENSION KIT	
30' EXTENSION, SAE, POWER DOWN	266389-01
BATTERY	
BATTERY,12V HD (SEALED, MAINTENANCE FREE, GROUP SZ 31)	267318-01
CYCLE COUNTER KIT	
CYCLE COUNTER, GPT	280590-02

MAXON[®] 11921 Slauson Ave. Santa Fe Springs, CA. 90670 (800) 227-4116 FAX (888) 771-7713


RECOMMENDED LIFTGATE POWER CONFIGURATION

NOTE: Make sure the Liftgate power unit, and all batteries on the vehicle for the power unit are connected correctly to a common chassis ground.

1. Liftgate and additional battery box are typically installed on trailers as shown in **FIG. 41-1** and on trucks as shown in **FIG. 41-2**. See the following page for battery and cable connections.

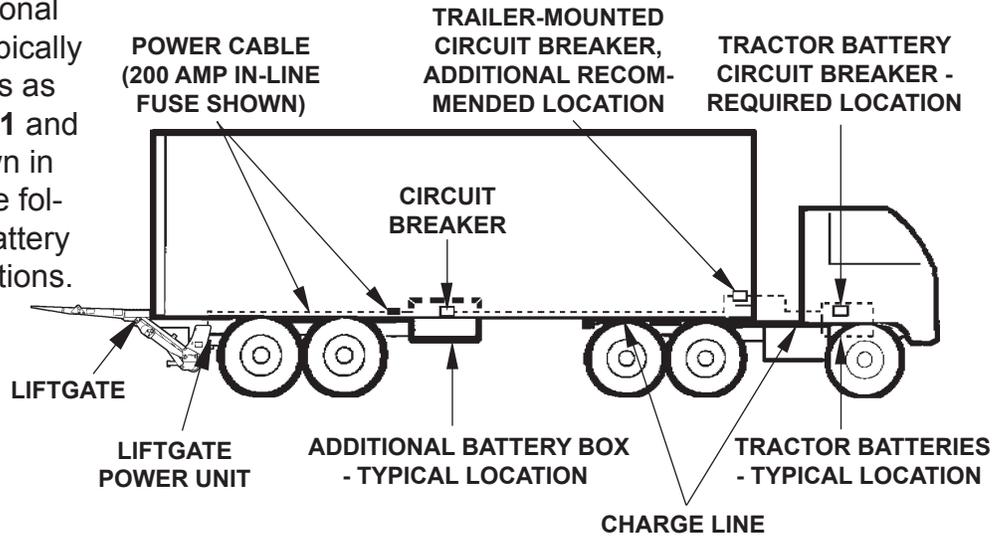

**RECOMMENDED LIFTGATE & BATTERY BOX
INSTALLATION ON TRAILER
FIG. 41-1**

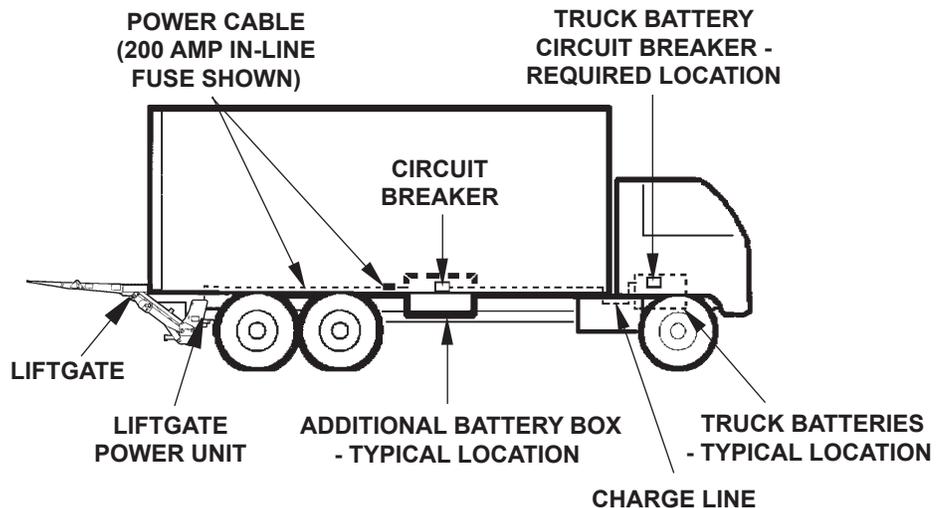

**RECOMMENDED LIFTGATE & BATTERY BOX
INSTALLATION ON TRUCK
FIG. 41-2**

RECOMMENDED LIFTGATE POWER CONFIGURATION - Continued

NOTE: Always connect fused end of power cable to battery positive (+) terminal.

2. Recommended battery box setup for **6 volt batteries** is shown in **FIG. 42-1**.

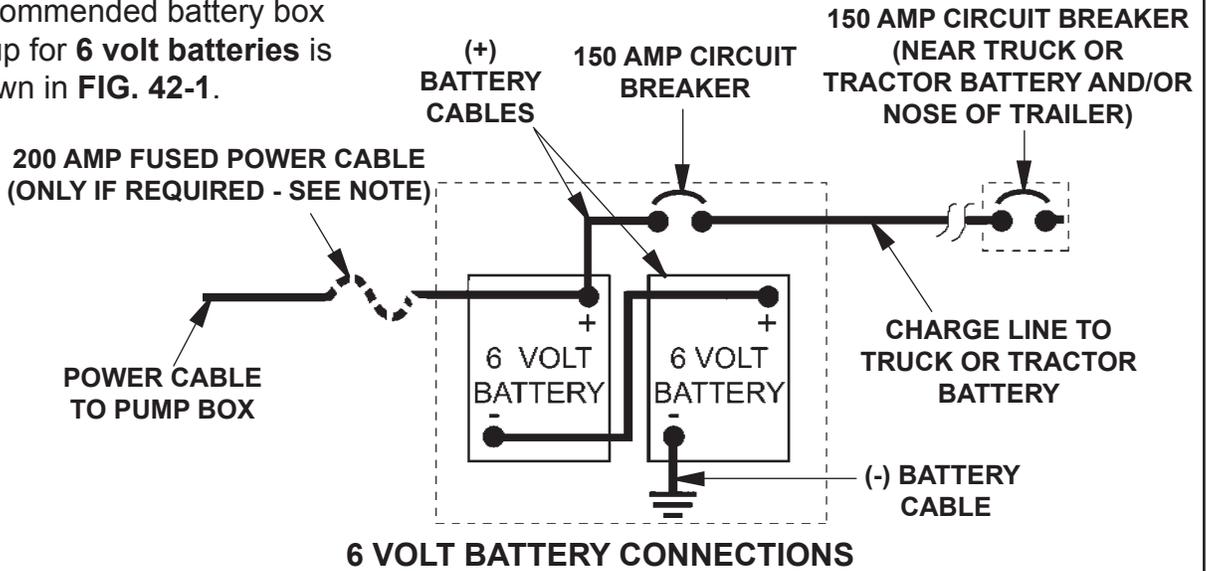


FIG. 42-1

NOTE: Always connect fused end of power cable to battery positive (+) terminal.

3. Recommended battery box setup for **12 volt batteries** is shown in **FIG. 42-2**.

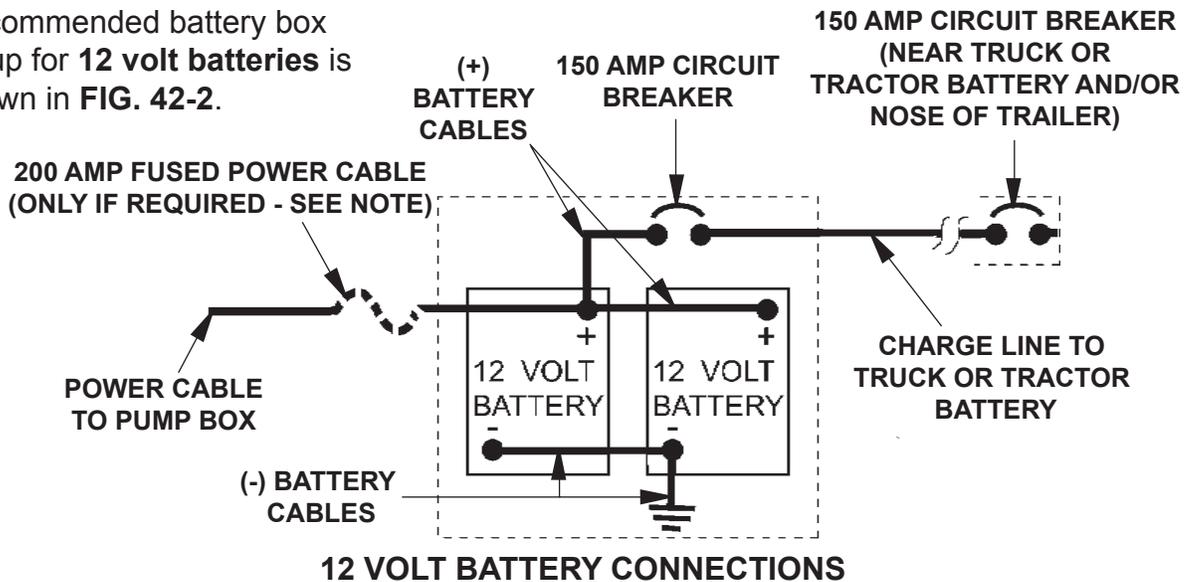


FIG. 42-2

