# SLIDELIFT® SERIES The GPST Series






### **GPST SPECIFICATIONS**

The GPST is MAXON's latest addition to its Slidelift® product range. This slider is explicitly designed for trucks and excels in performance as well as compact dimensions

- The GPST features the unique X1 technology which utilizes only one lift and one tilt cylinder, resulting in less parts (e.g. less hoses, valves, etc.) and consequently less maintenance costs
- The GPST utilizes two opposing cylinders to slide in and out resulting in a smooth and reliable deployment
- The GPST features a unique Quick Lock mechanism. The Quick Lock carries the load (not the rollers) and avoids platform bouncing when moving load from the truck to the platform

MODEL CAPACITY	OVERALL WEIGHT	PLATFORM SIZE	BED HEIGHT
GPST-44 4,400 Lbs.	1,654 Lbs.	67" X 94.5"	38" Laden 56" Unladen

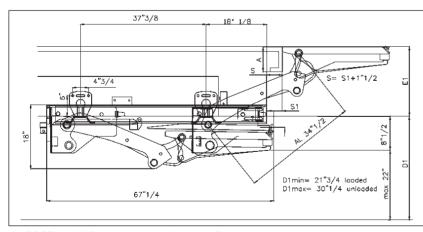

GPST-44 Lift Dimensions and Mounting Requirements

E1	S 1Min	S 1Max	A Max
15.75"	3.23"	6.75"	6.25"
17.75"	2.13"	5.5"	7"
19.75"	0.79"	2.75"	7.5"
21.75"	0	2.75"	8"
23.5"	0	0.75"	8.75"
26"	0	0	9.75"

NOTE: Please review appropriate liftgate installation manual for full vehicle and or body requirements to ensure proper fitment.




## SLIDELIFT® SERIES The GPST Series



#### **Standard Features**

- Torsion spring assisted flip over section
- Powerdown
- Dual cart stops
- Foot controls (can be disabled if not needed)
- Warning lights
- Maintenance-free bushings
- Completely sealed wiring harness
- Hand held control

#### **Loadable Platform Space** with Cart Stops Deployed



#### **Distributed by:**

M-195-1123



#### **Unique X1 Technology**

The unique X1 technology utilizes only one lift and one tilt cylinder. Resulting in less parts (e.g. less hoses, valves, etc.) and consequently less maintenance




#### **Double Acting Cylinders**

The GPST slides in and out via double acting cylinders that ensure smooth and gentle sliding




#### **Unique Locking Mechanism**

The GPST's Quick Lock carries the load (not the rollers) and avoids platform bouncing when moving load from the truck to the platform



#### **Electrical & Trouble Shooting Features**

The GPST offers a service switch that allows you to trouble shoot the gate and to operate the gate if the main control fails. The wiring harness is fully sealed



#### Installation

The GPST installation is efficient and thus cost effective. Simple and fast installation with 4 adjustable brackets (accommodates frame widths from 28" - 35"). It only requires 67" of rear overhang and accommodates bed heights from 38" - 56".



